

Socket connectors 1.27mm

Single row/double row
Surface mount



深圳平志电子有限公司
SHENZHEN PIZCONN ELECTRONIC CO.,LTD

TEL:86-755-84106483 61121902

FAX:86-755-61121902



E-mail:ivan@pizconn.com.cn

Ordering information

TLD - NNN X - A P P 0640A

No. of Positions	Insulator Type code	Pin Plating code	Clip Plating code
	1 Single row	1 Tin150μ"	1 Tin150μ"
	2 Double row	2 Tin200μ"	2 Tin200μ"
	3 Triple row	3 GF	3 GF
		4 Gold2μ"	4 Gold2μ"
		5 Gold3μ"	5 Gold3μ"
		6 Gold10μ"	6 Gold10μ"
		7 Gold15μ"	7 Gold15μ"
		S Special	S Special

Series: TLD

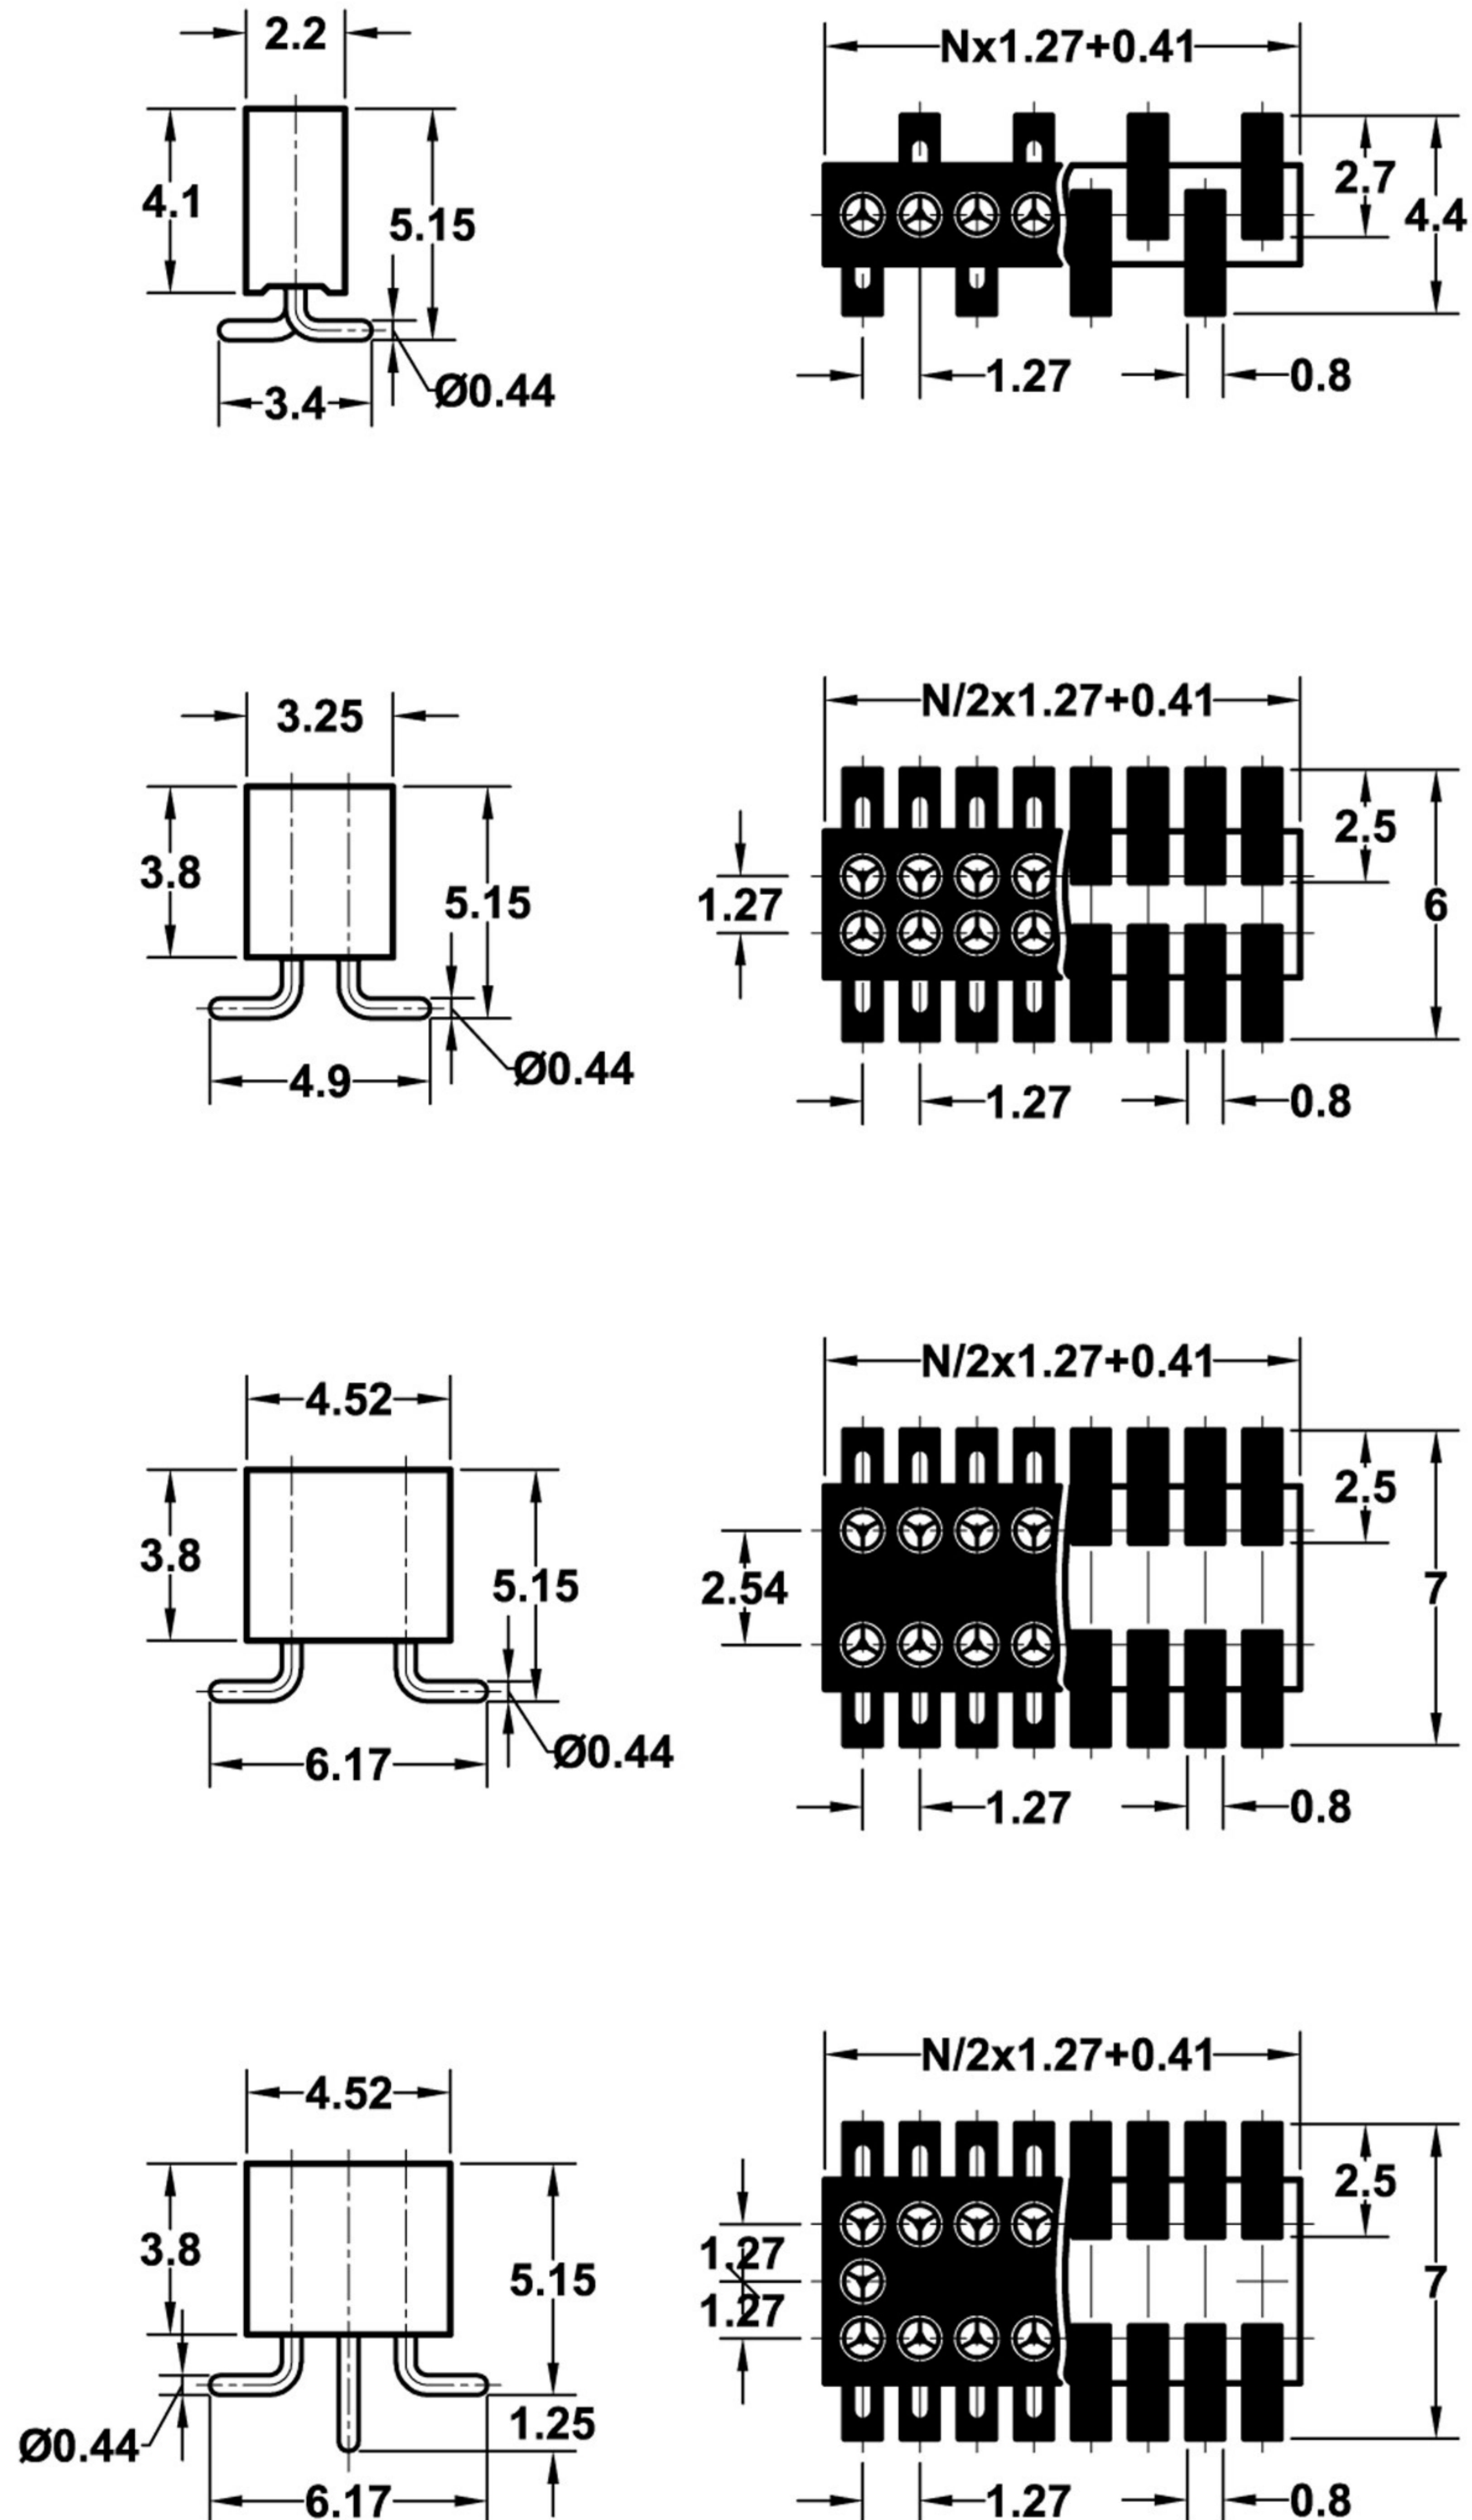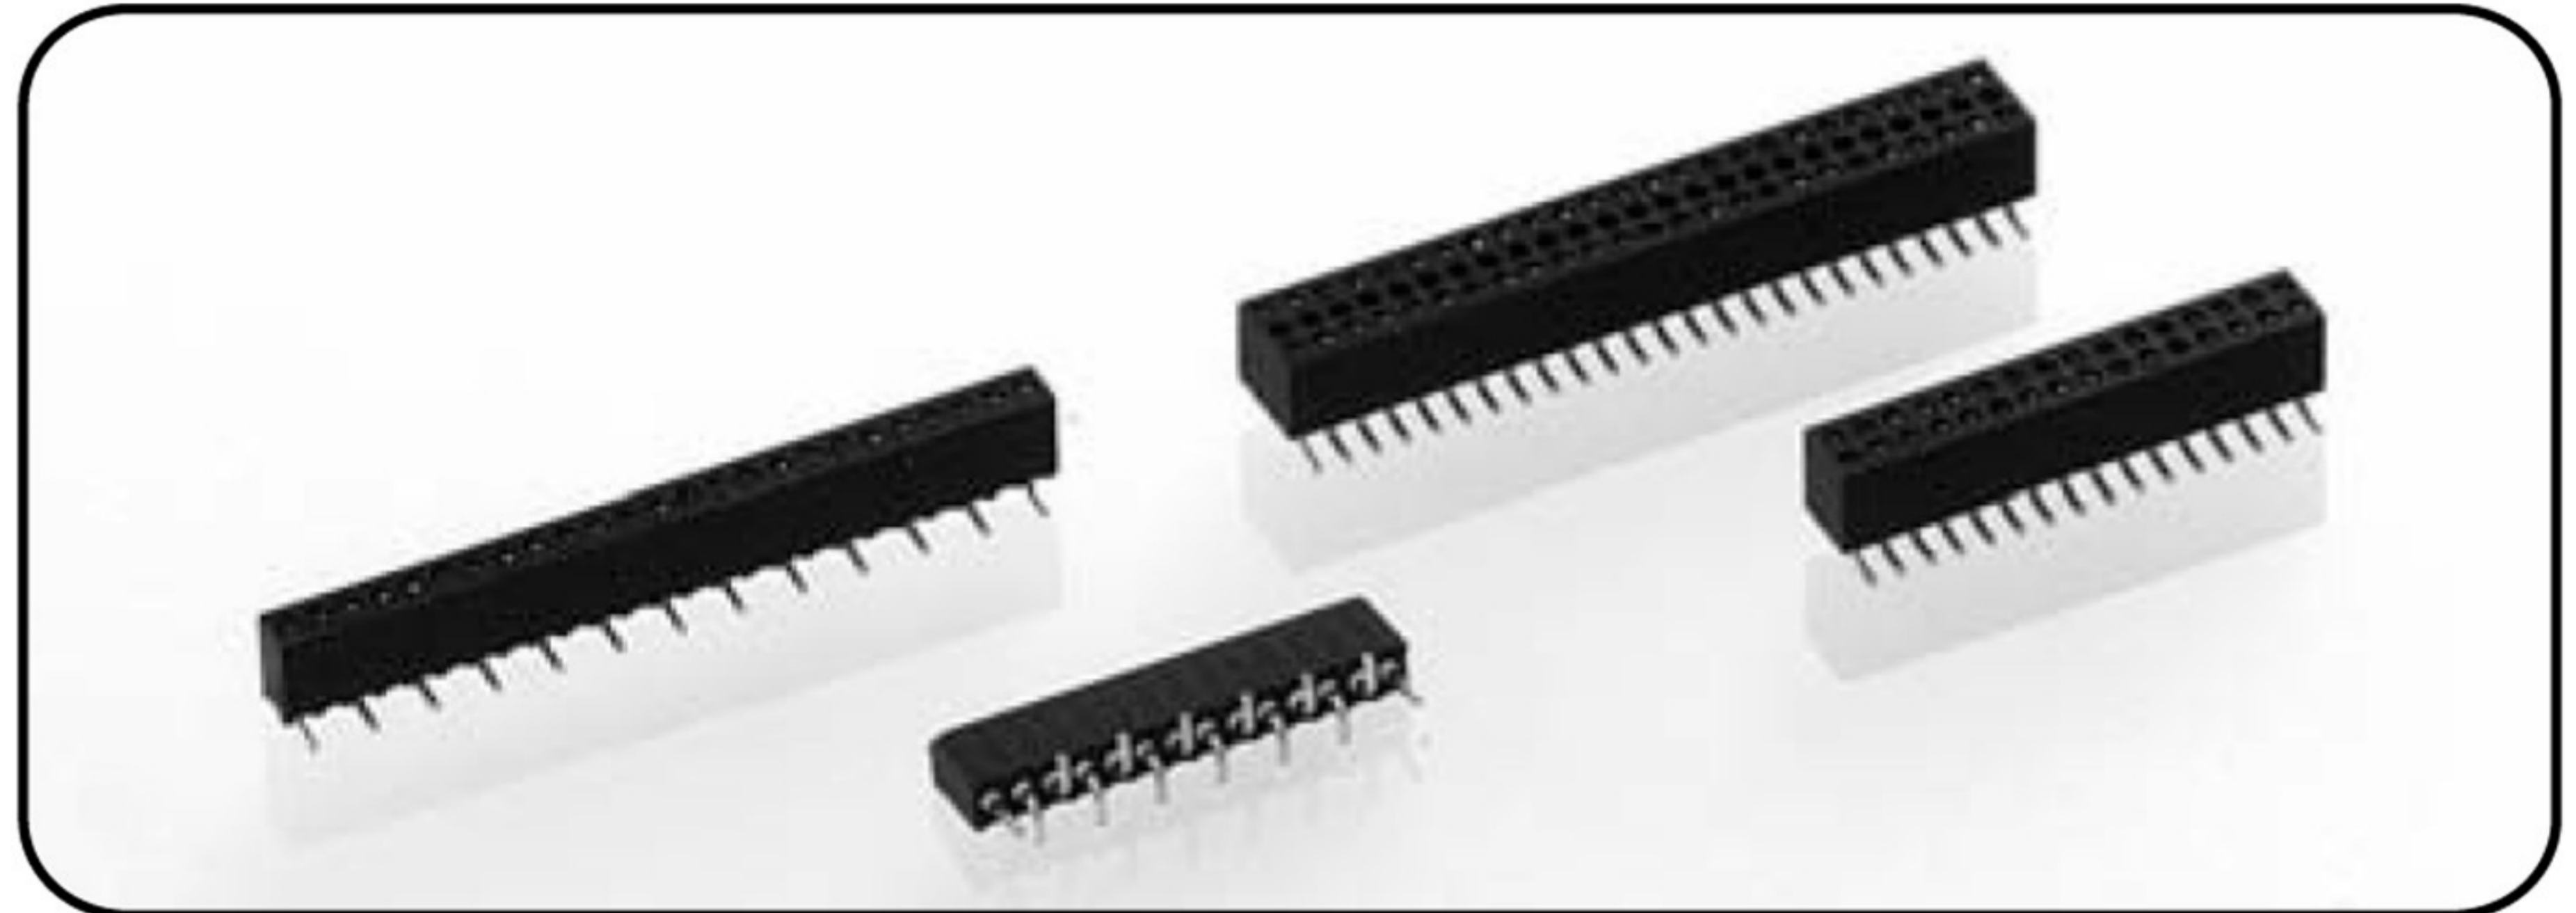

Ultraminiature PCB socket connectors SMD mount

Technical Specs:

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass CuZn 36pb3(36000)
Contact clip (3 finger):	Beryllium copper (C17200)
Mating pin Ø:	0.35 to 0.50 mm
Forces:	(polished steel gauge Ø 0.41mm)
-Insertion	0.5 N typ.
-Withdrawal	0.2 N typ.
Mechanical life:	min 500 cycles
Rated current:	1 A
Contact resistance:	max 20 mΩ
Dielectric strength:	min 500V _{RMS}
Coplanar SMD terminations:	max 0.1mm (measured on 25 mm long connectors)