

# Pin connectors 1.27mm

Single row/double row  
Surface mount



深圳平志电子有限公司  
SHENZHEN PIZCONN ELECTRONIC CO.,LTD

TEL:86-755-84106483 61121902

FAX:86-755-61121902



E-mail:ivan@pizconn.com.cn

## Ordering information

GLD - NNN X - A P 0820A

No. of Positions	Insulator Type code	Pin Plating code
	1 Single row	1 Tin150μ"
	2 Double row	2 Tin200μ"
	3 Triple row	3 GF
		4 Gold2μ"
		5 Gold3μ"
		6 Gold10μ"
		7 Gold15μ"
		S Special

## Series: GLD

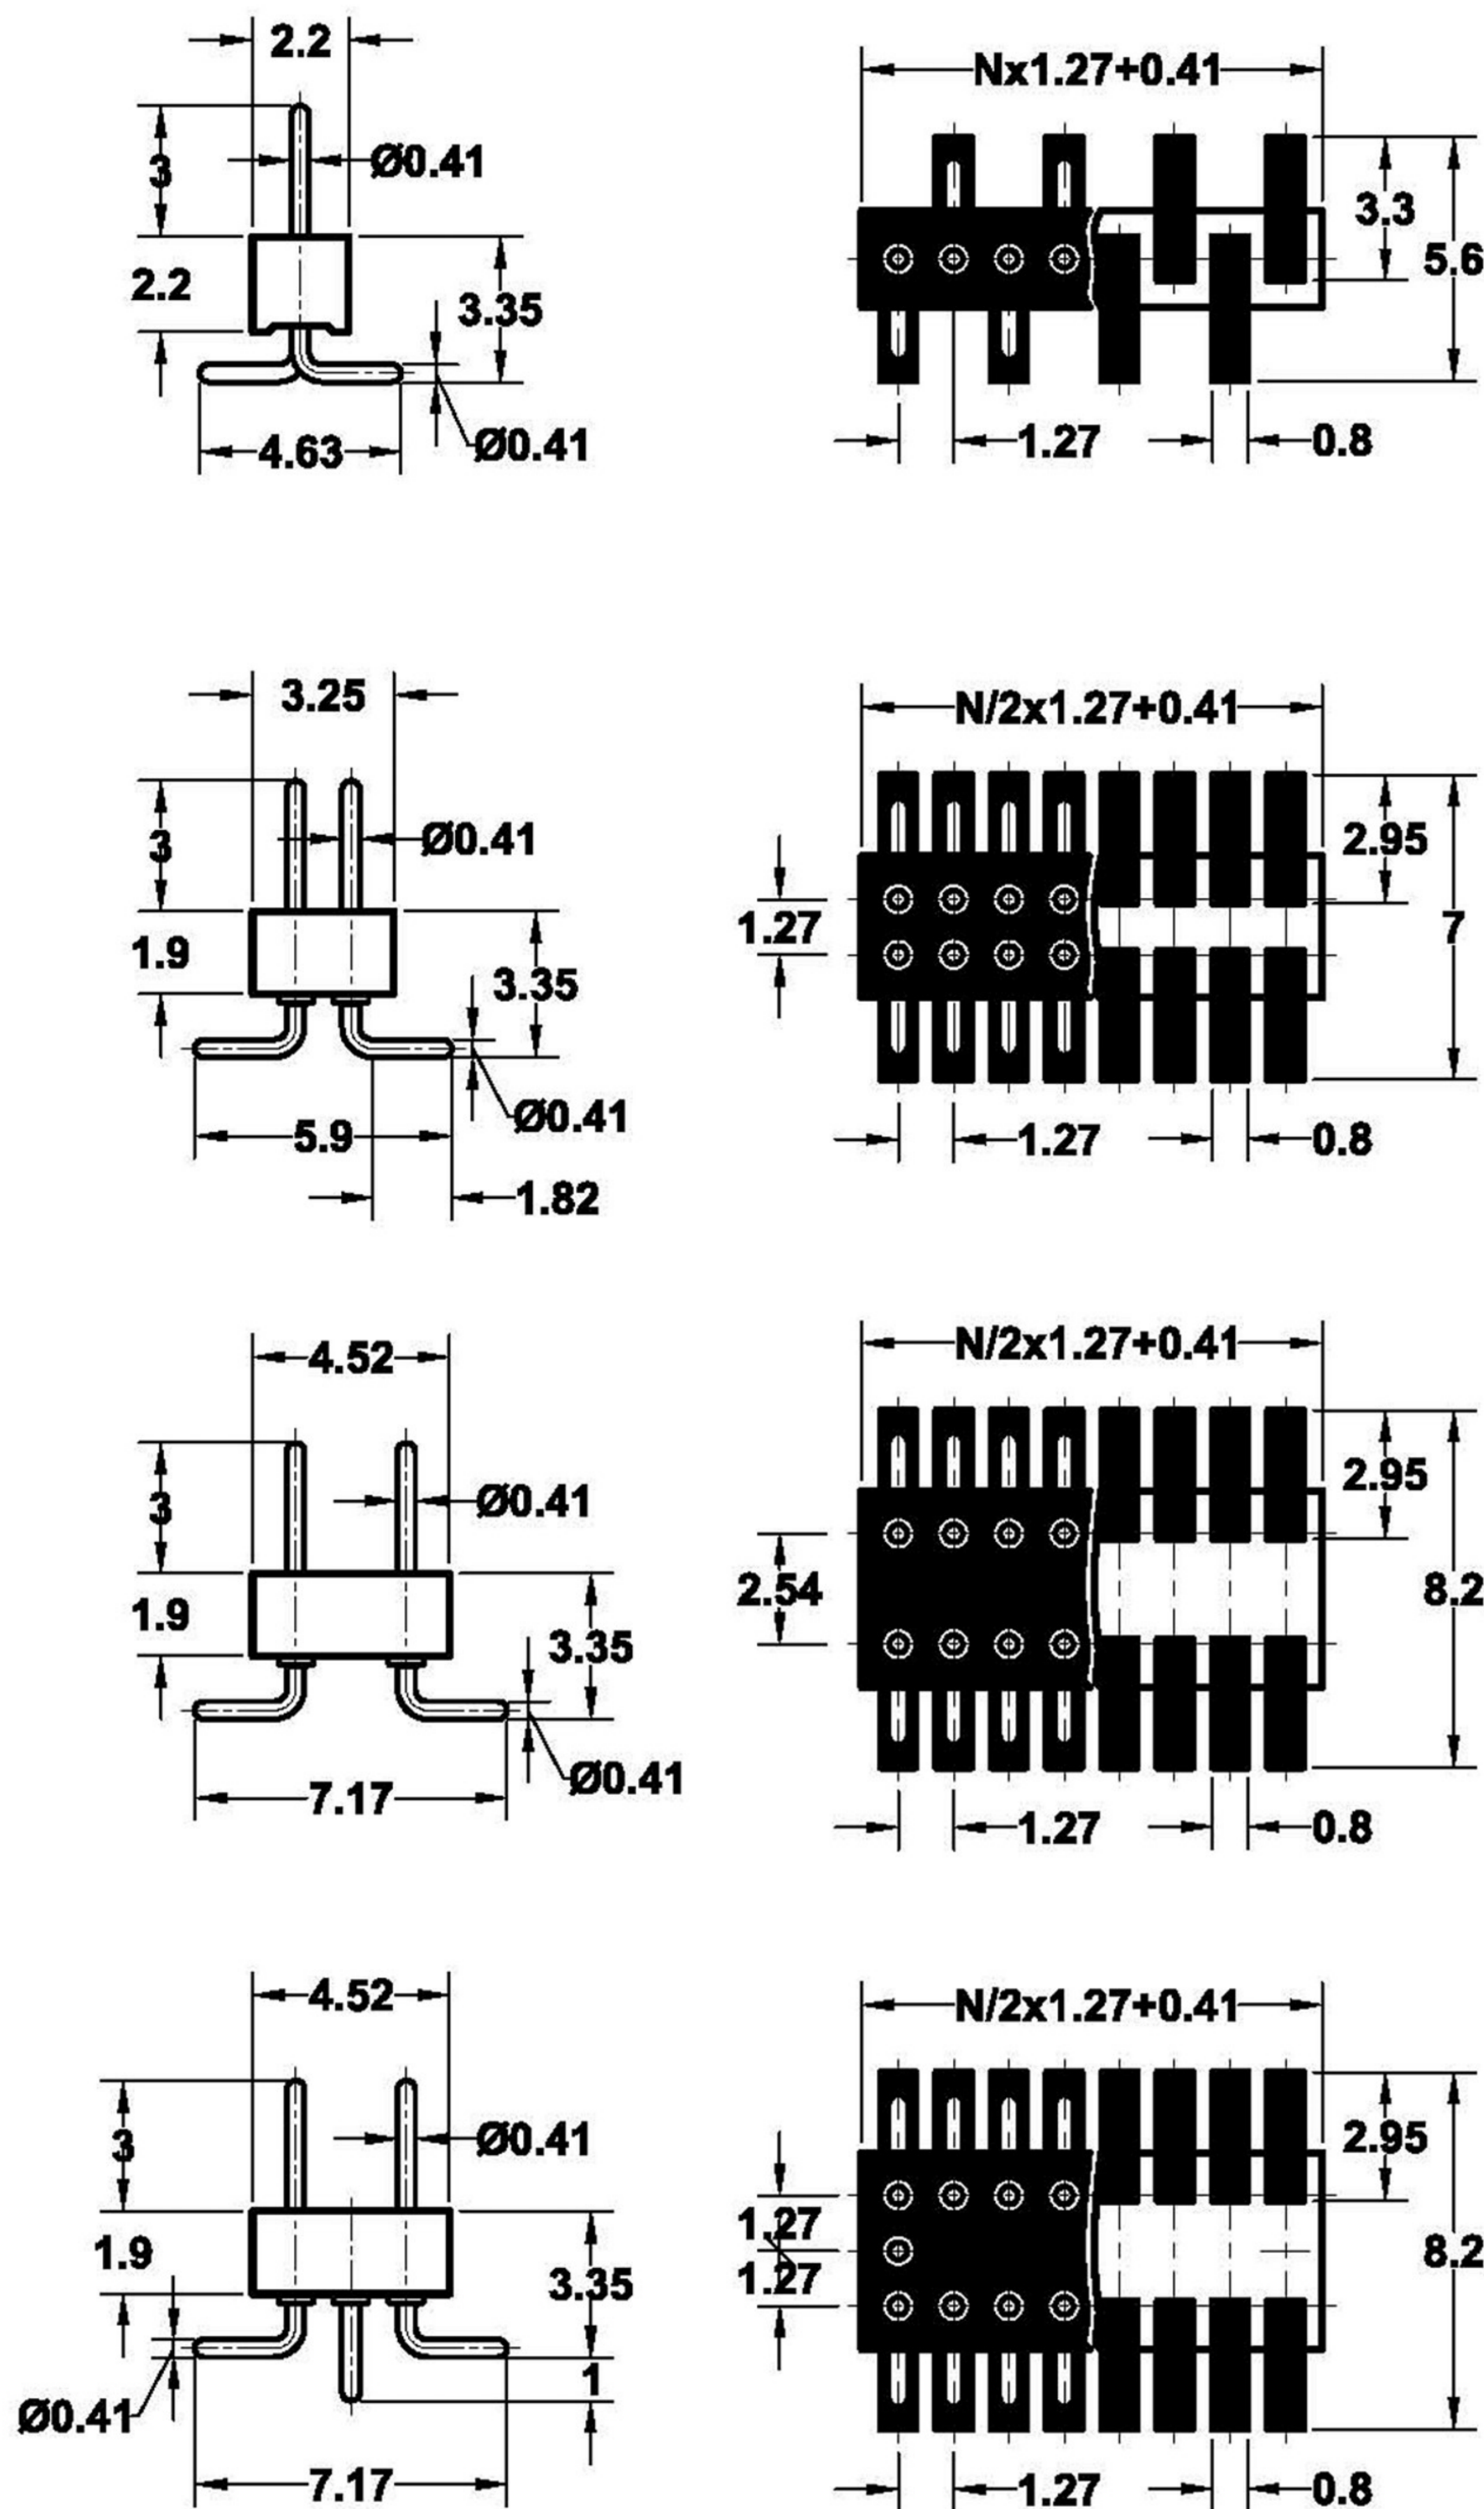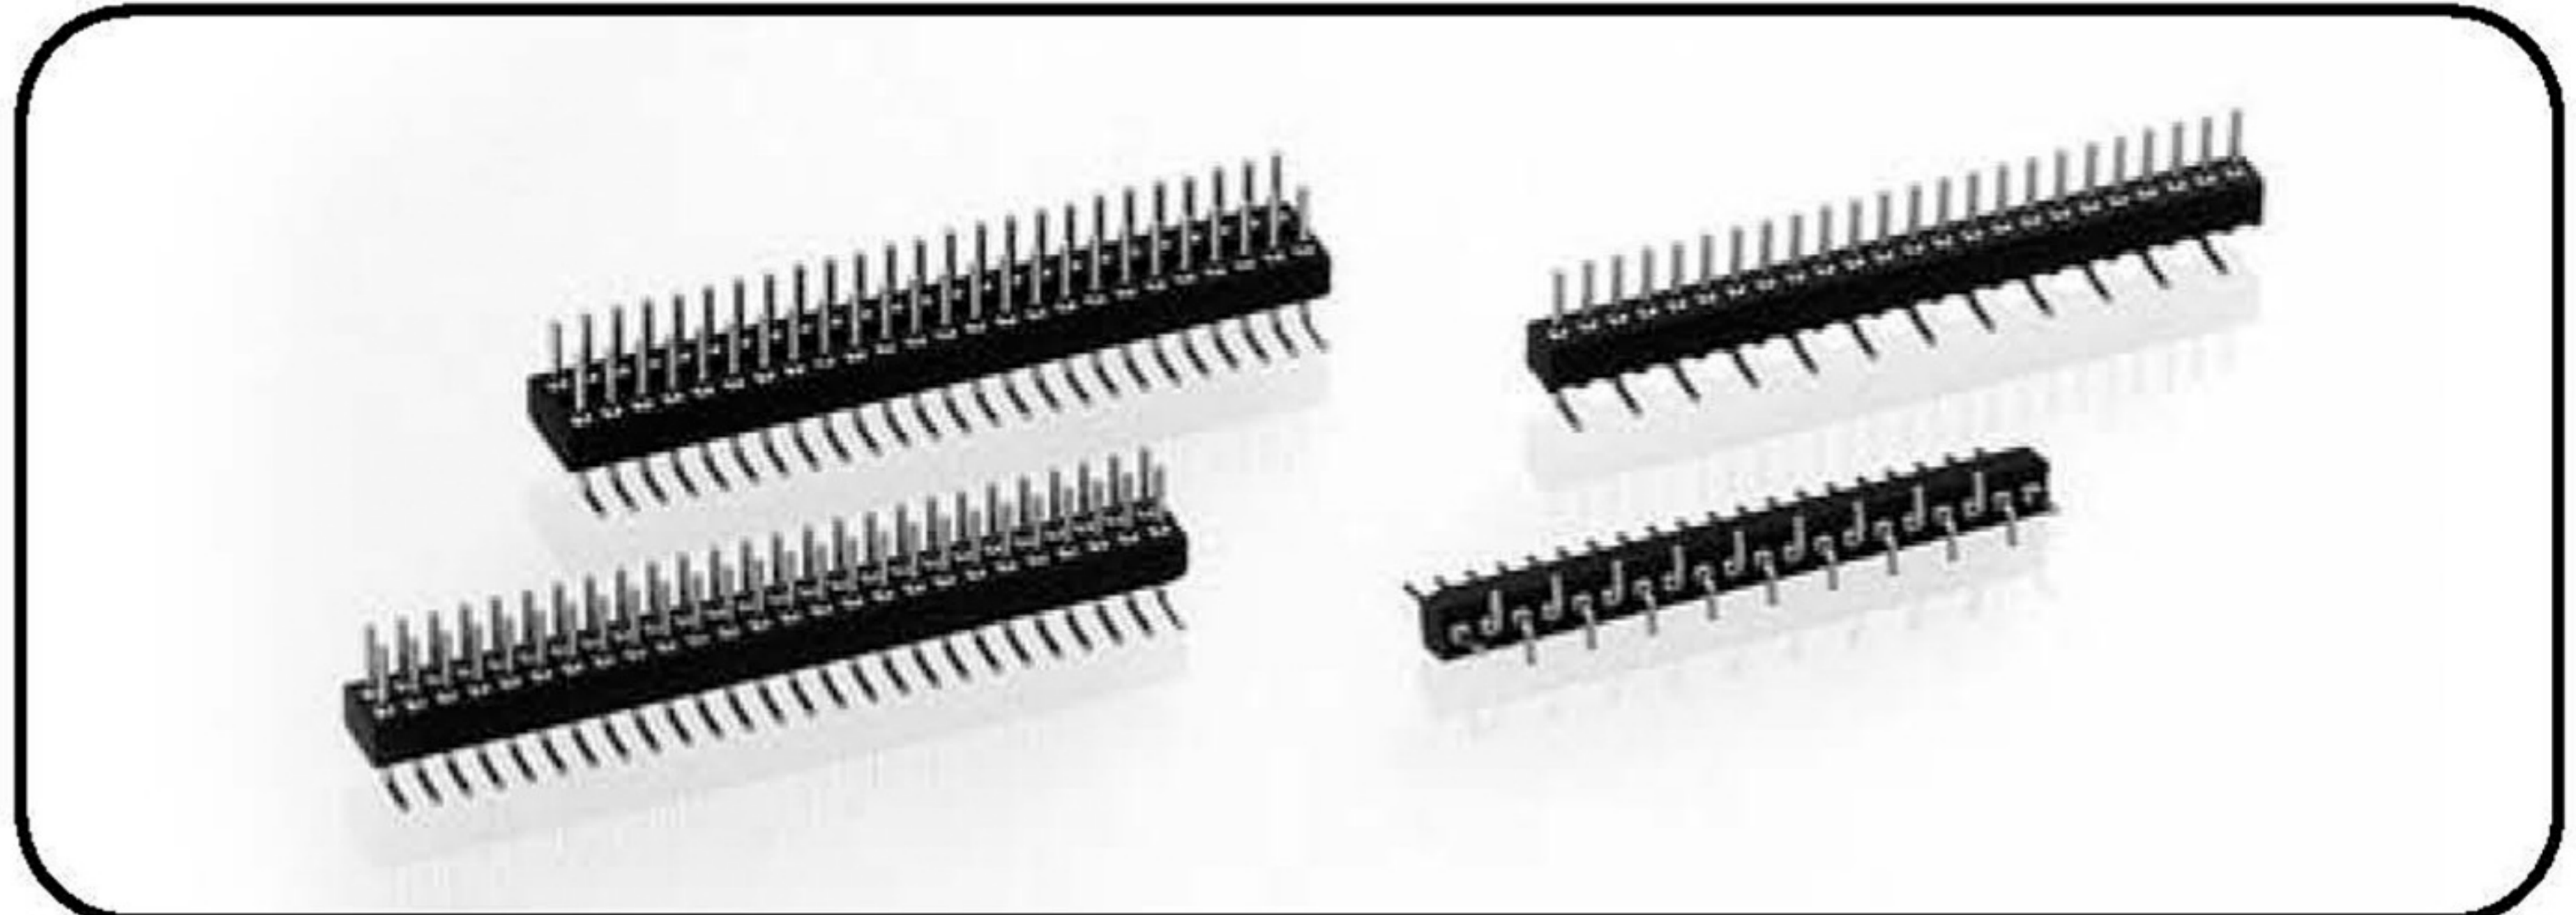

### Ultraminiature PCB pin connectors, surface mount

#### Technical Specs:

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass CuZn 36pb3(36000)
Mating pin Ø:	0.41 mm
Mechanical life:	min 500 cycles
Rated current:	1 A
Contact resistance:	max 10 mΩ
Dielectric strength:	min 1000V <sub>RMS</sub>
Coplanarity SMD terminations:	max 0.1mm(measured on 25 mm long connectors)