

Pin grid array sockets 2.54*1.27mm



TEL:86-755-84106483 61121902

FAX:86-755-61121902

E-mail:ivan@pizconn.com.cn




Interstitial
Solder tail / surface mount
Press-fit terminations

Series: **GLA2**

Ordering information

GLA2 - NNN X - B P P 0740A

No. of Positions	Connector Type code	Pin Plating code	Clip Plating code
	A socket	1 Tin150μ"	1 Tin150μ"
	B pin	2 Tin200μ"	2 Tin200μ"
		3 GF	3 GF
		4 Gold2μ"	4 Gold2μ"
		5 Gold3μ"	5 Gold3μ"
		6 Gold10μ"	6 Gold10μ"
		7 Gold15μ"	7 Gold15μ"
		S Special	S Special

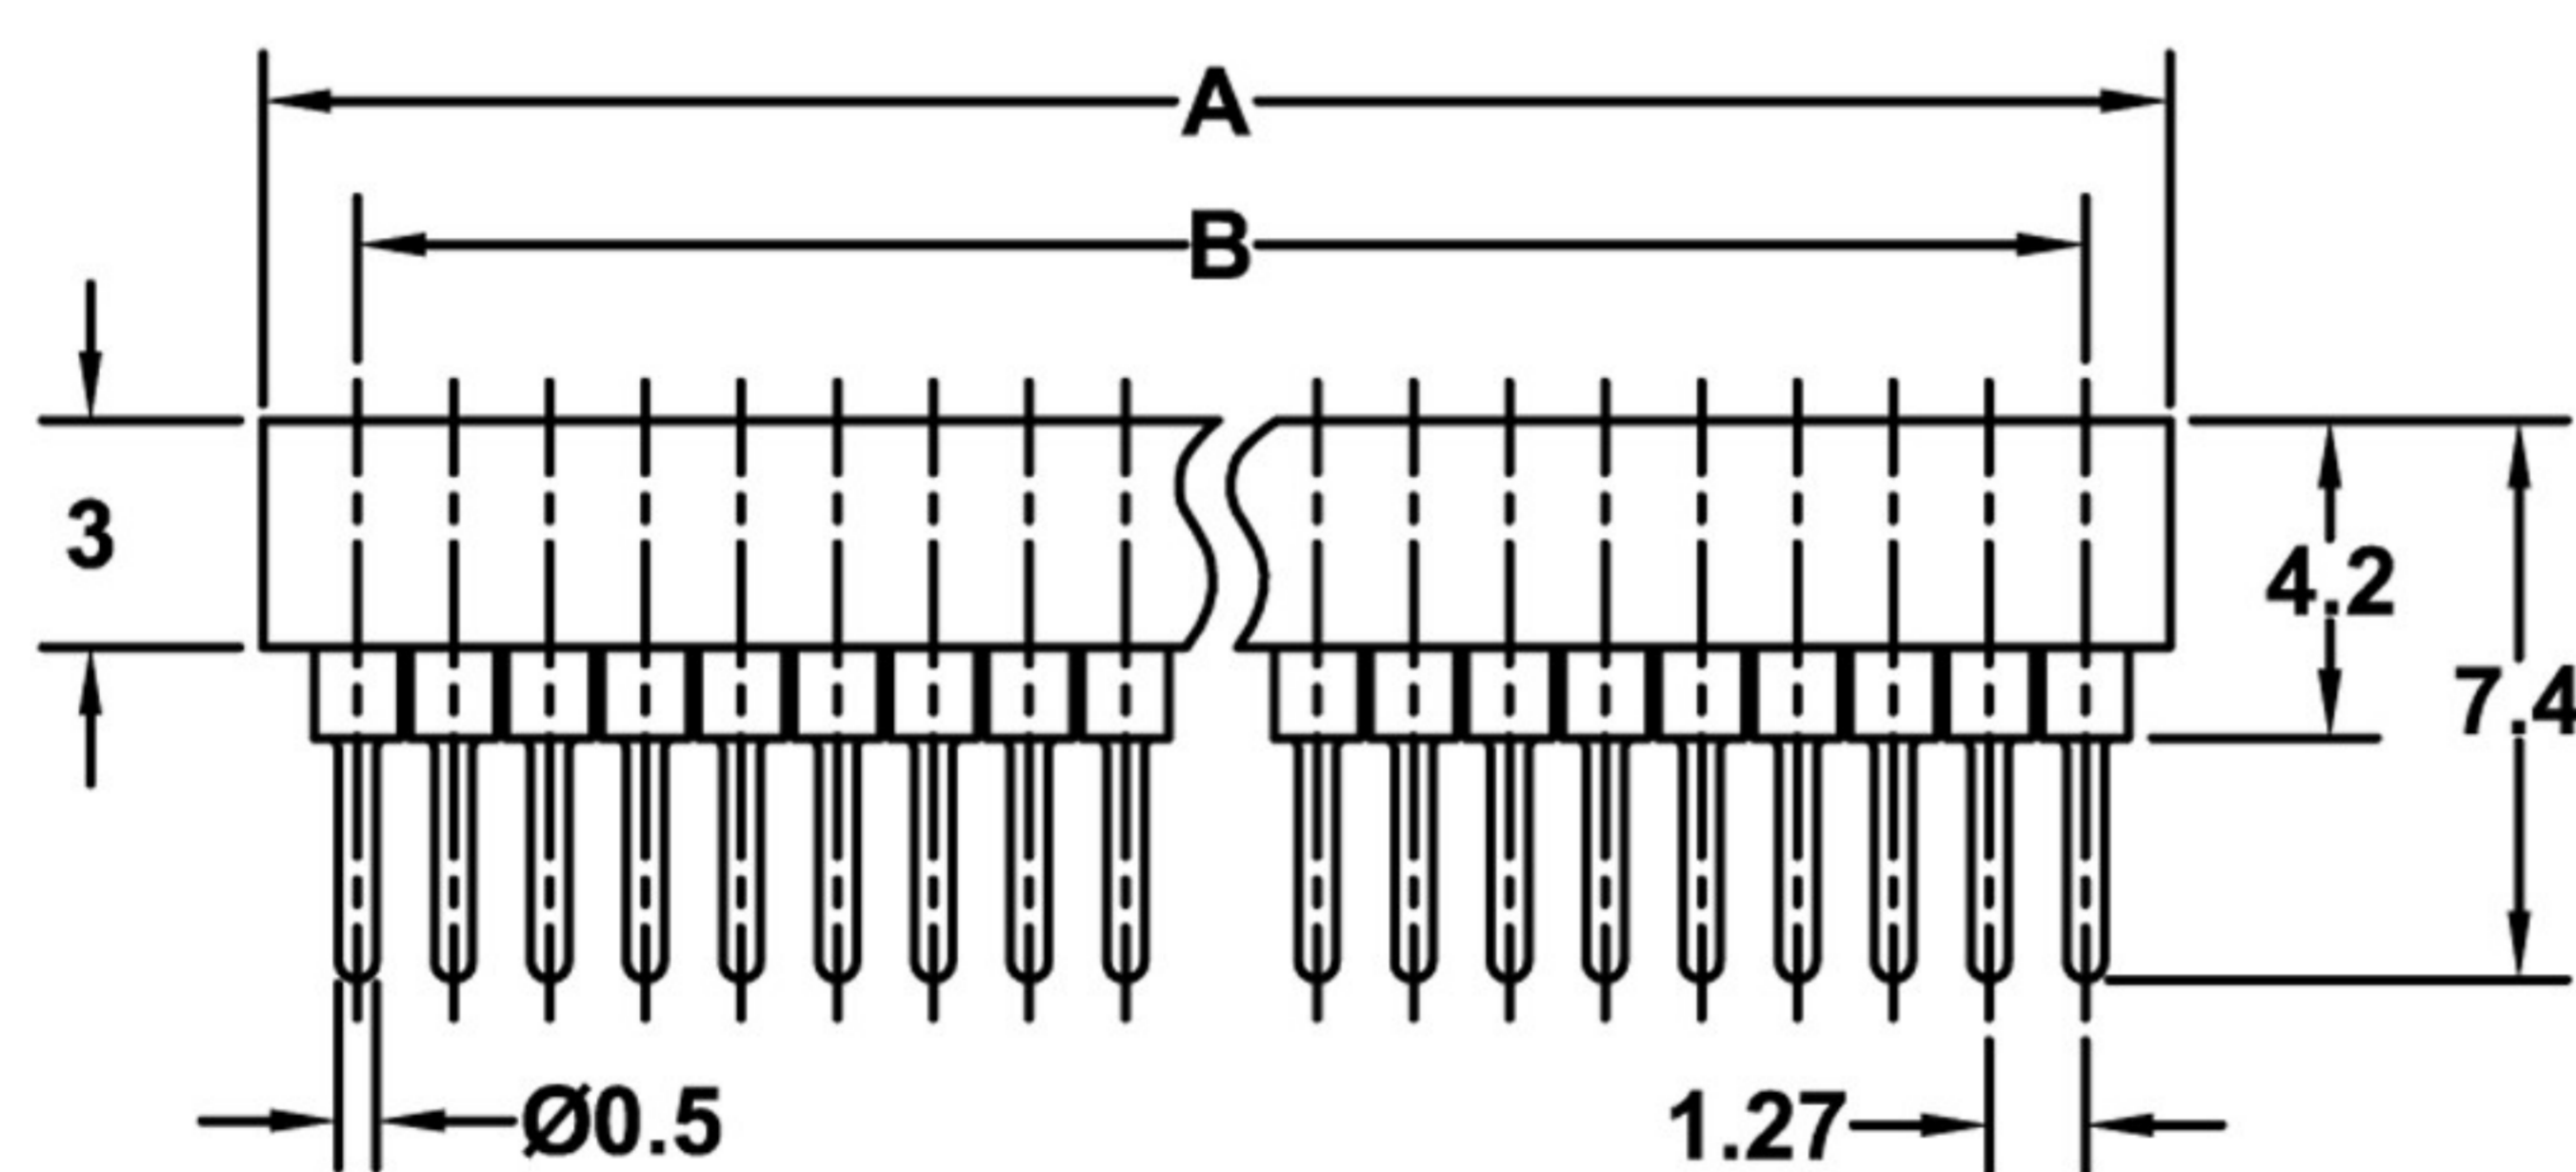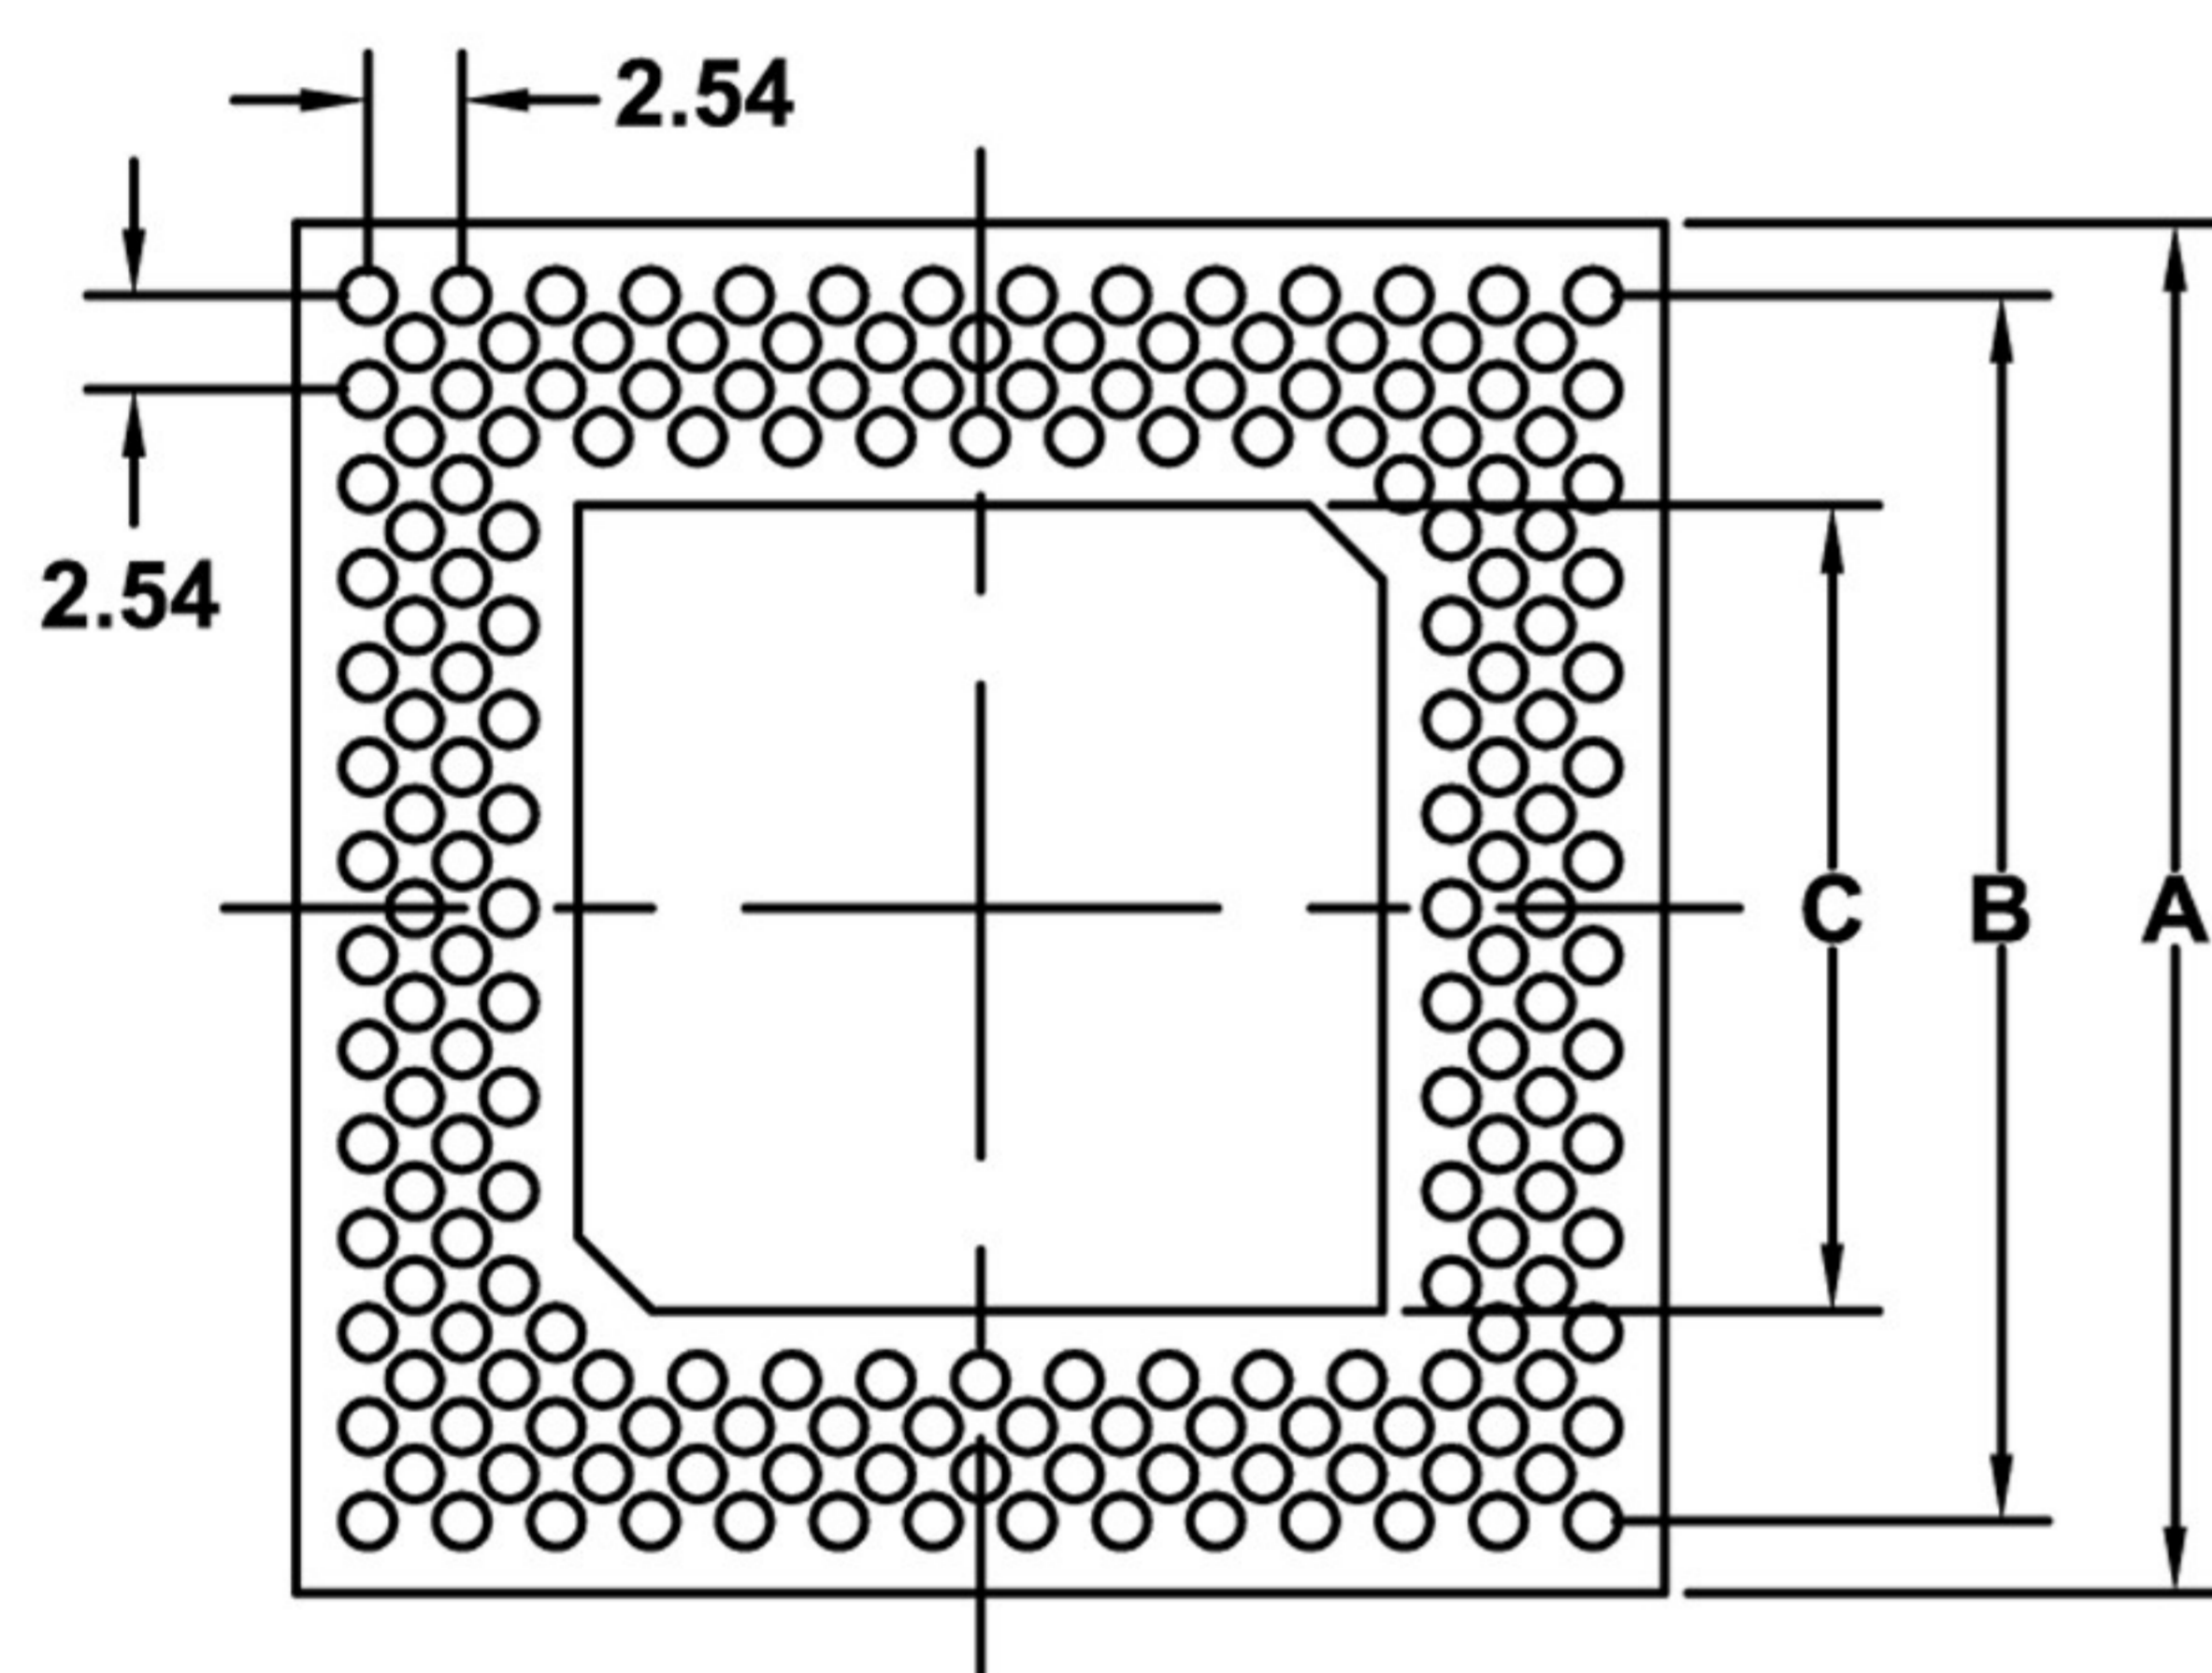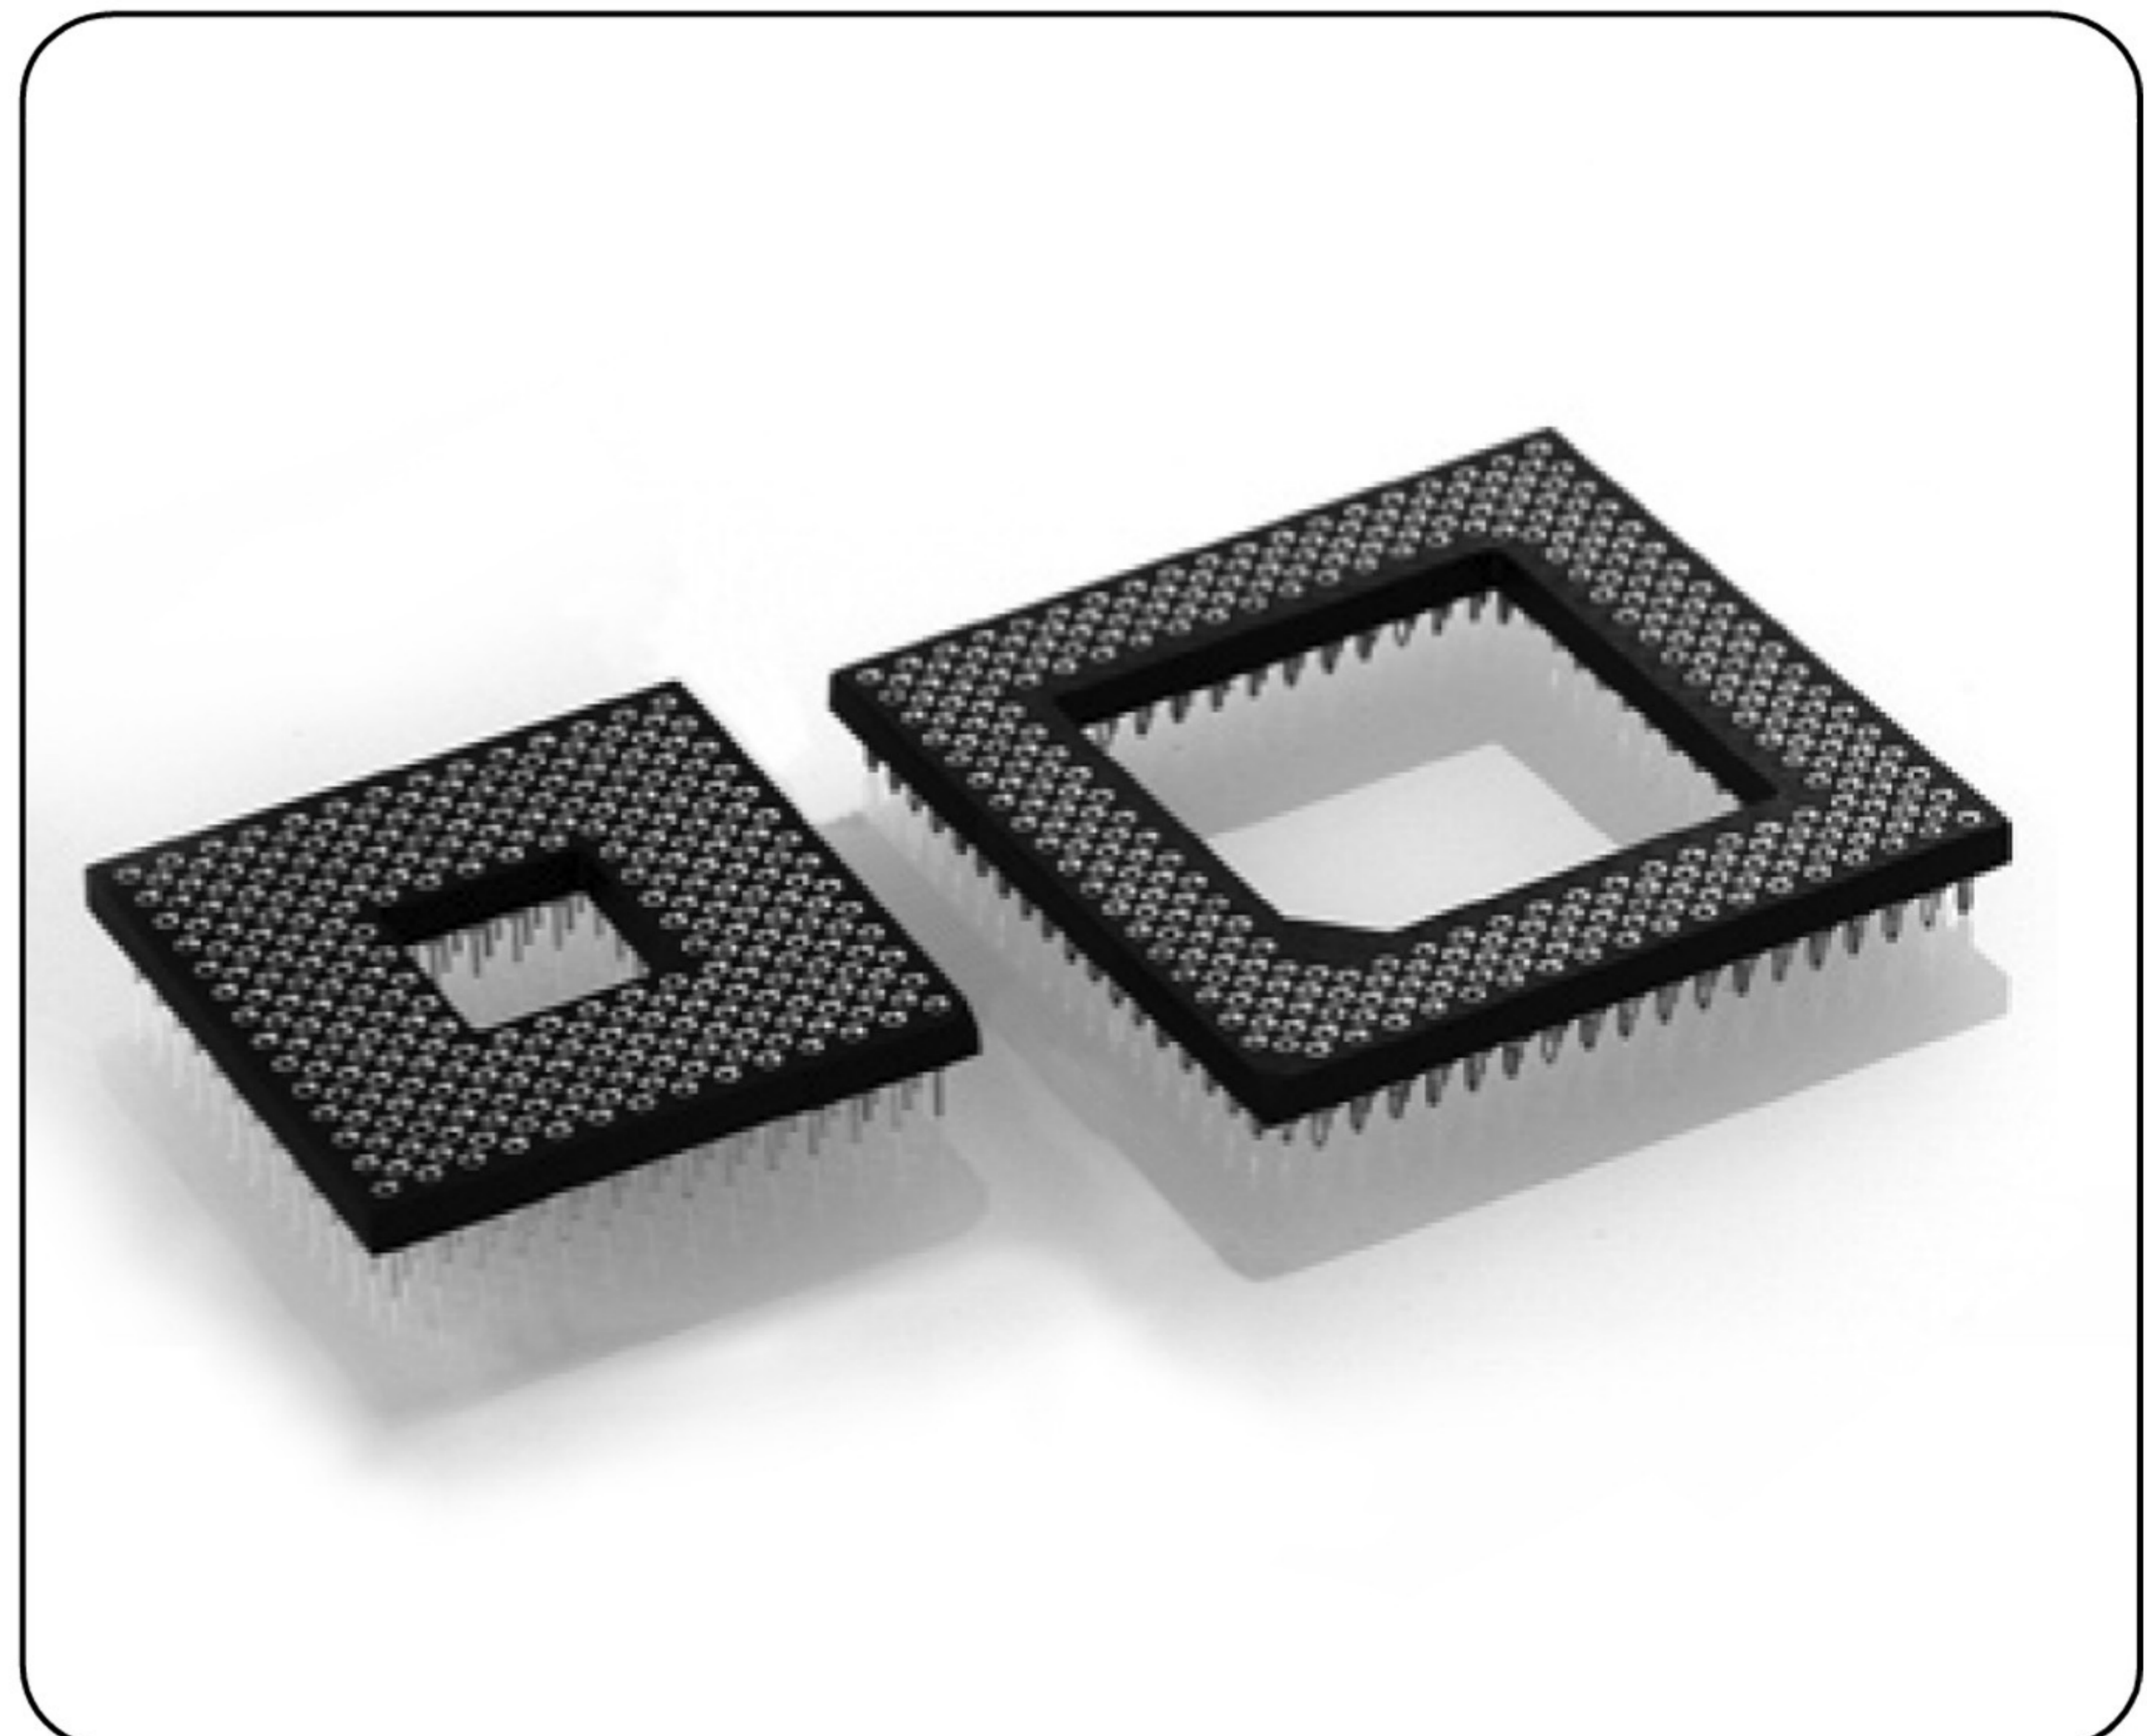

Pin grid array sockets with interstitial contact row, solder tails, surface mount floating contacts and solderless compliant

Technical Specs:

Insulator:	Black glass filled polyester PPS-GF30-FR
Flammability:	UL 94V-O
Sleeve:	Brass CuZn 36pb3(36000) (Bronze CuSn4Zn4(C54400)for press fit contacts
Contact clip (6 finger):	Beryllium copper (C17200)
Accepted pin Ø:	0.40 to 0.56 mm
Forces:	(polished steel gauge Ø 0.46mm)
-Insertion	0.4 N typ.
-Withdrawal	0.2 N typ.
Mechanical life:	min 100 cycles
Rated current:	1 A
Contact resistance:	max 10 mΩ
Dielectric strength:	min 700V _{RMS}