


Micro Pin grid array sockets

1.27*1.27mm grid
Solder tail / surface mount
Interconnect pin



TEL:86-755-84106483 61121902
FAX:86-755-61121902
E-mail:ivan@pizconn.com.cn




Series: GLA3

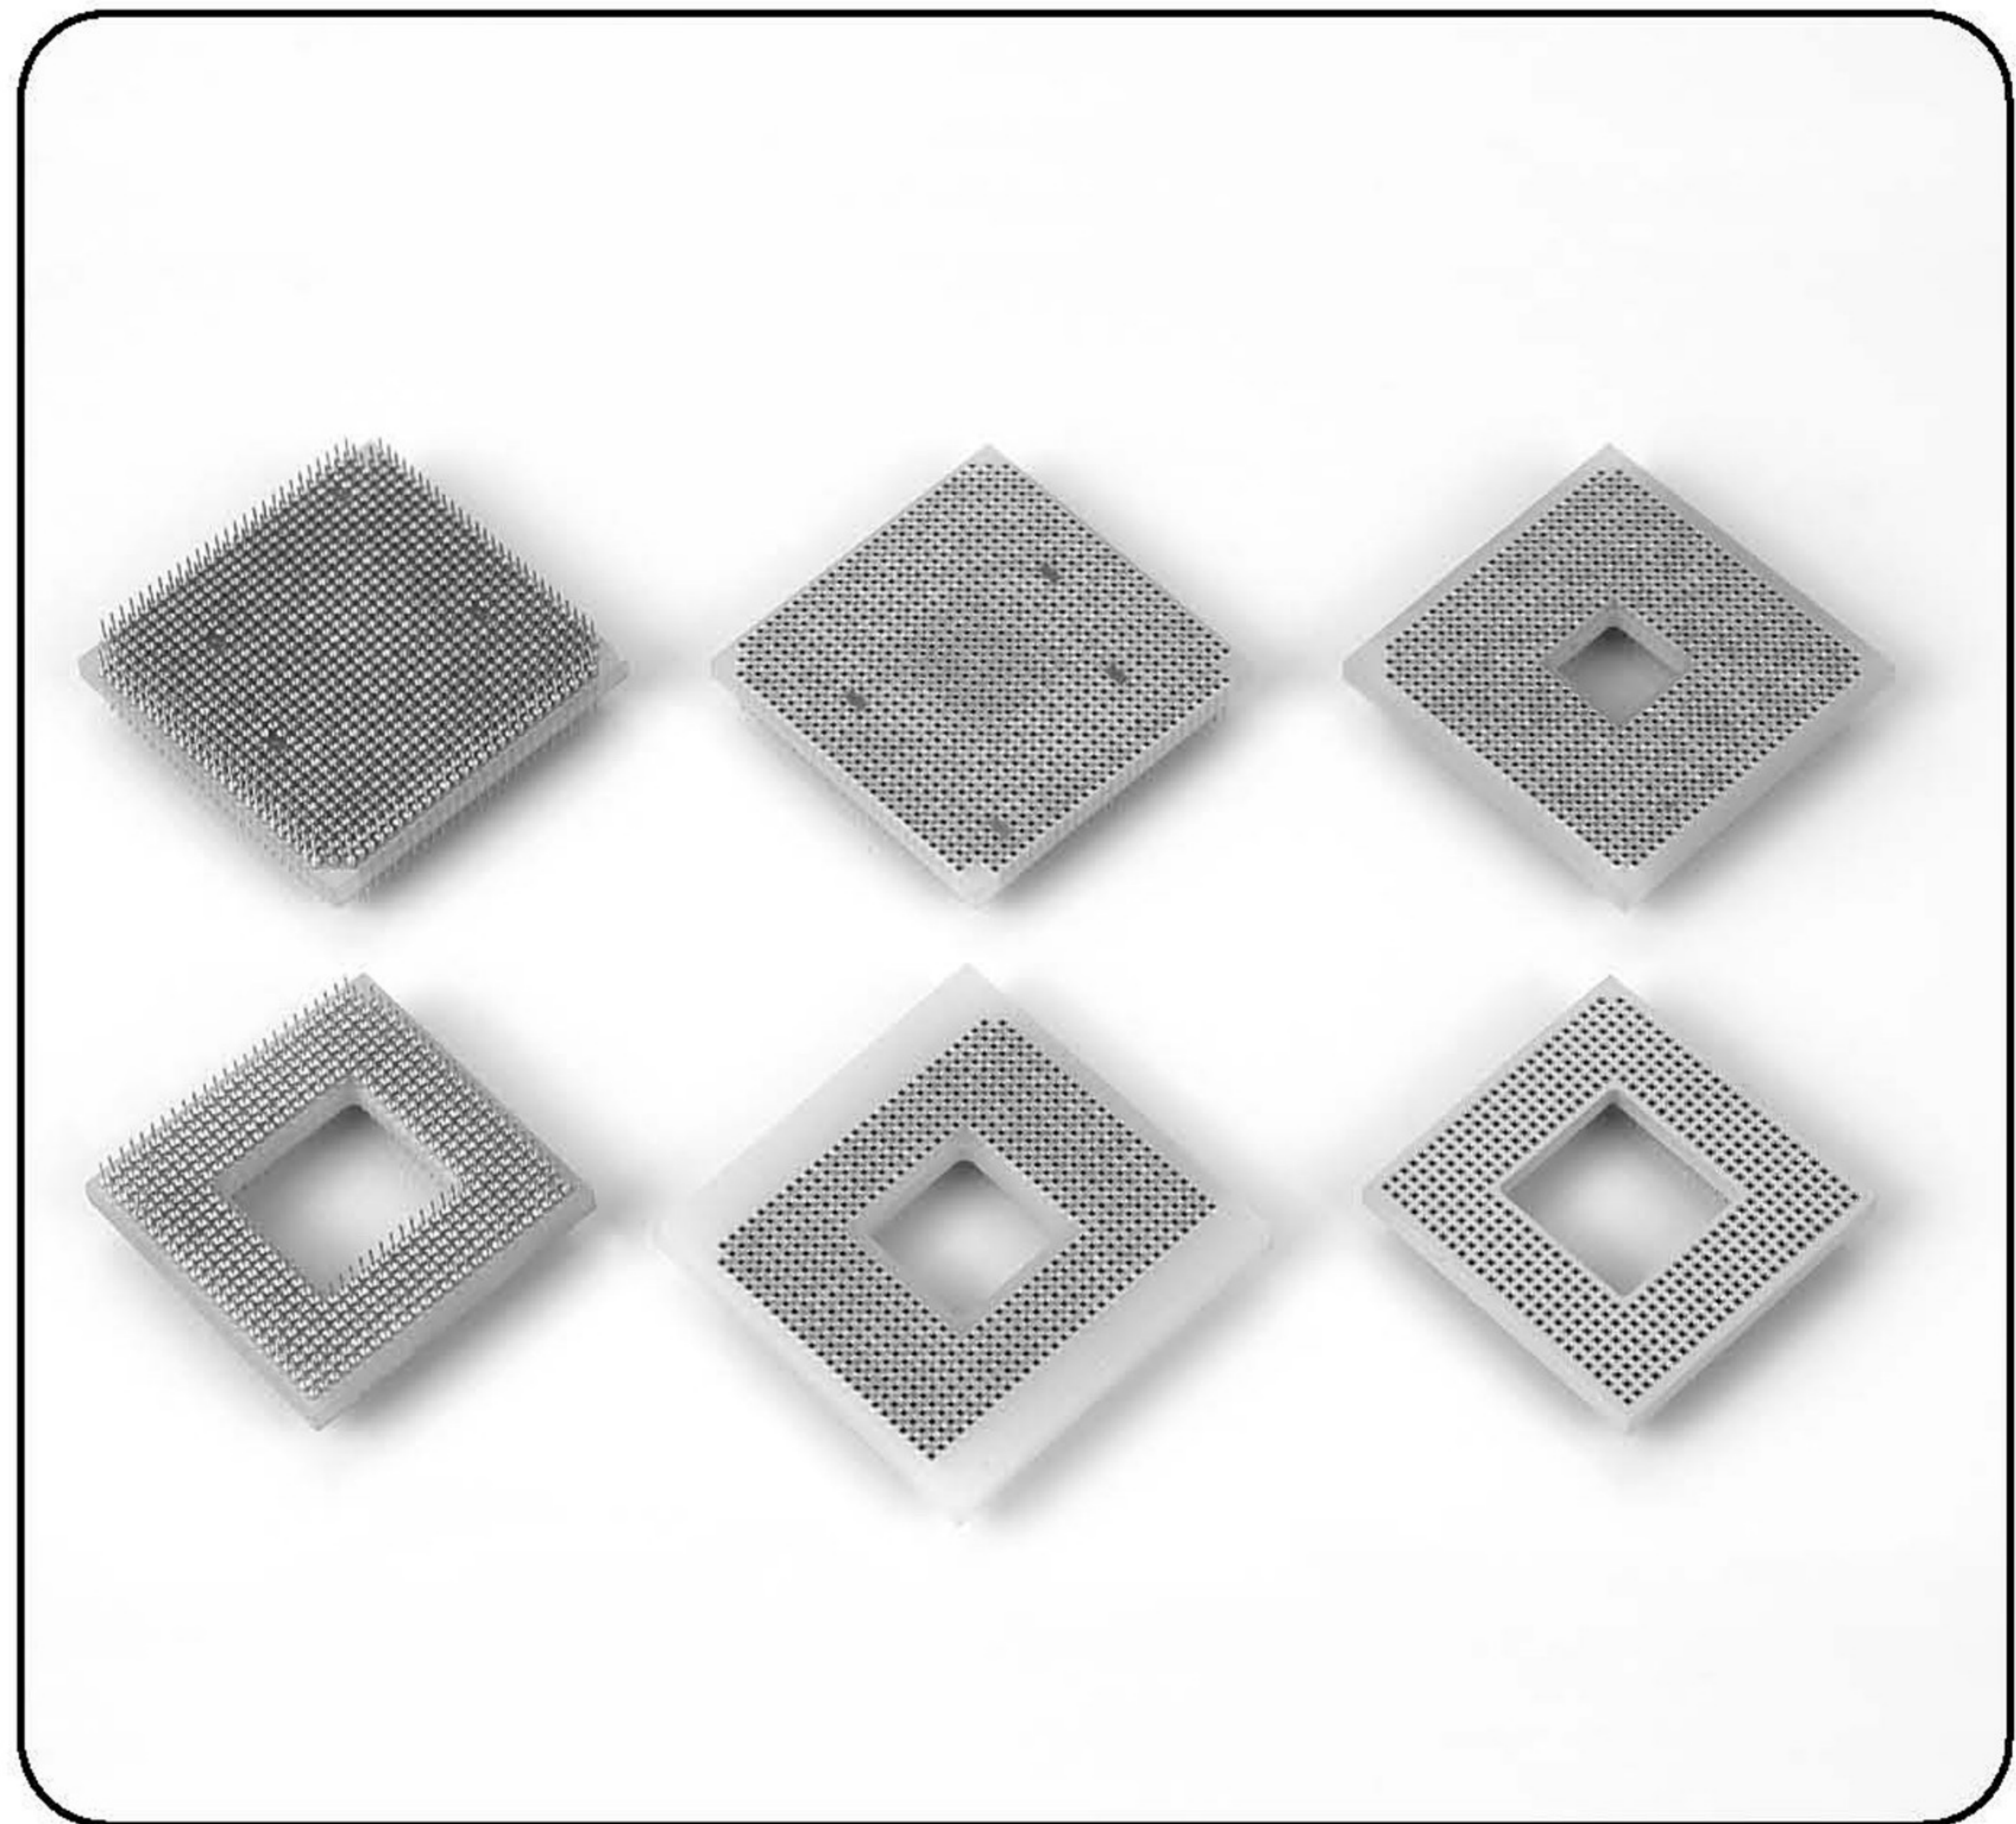

Ordering information

GLA3 - NNN X - A P P 0740A

No. of Positions	Connector Type code	Pin Plating code	Clip Plating code
	A socket	1 Tin150μ"	1 Tin150μ"
	B pin	2 Tin200μ"	2 Tin200μ"
		3 GF	3 GF
		4 Gold2μ"	4 Gold2μ"
		5 Gold3μ"	5 Gold3μ"
		6 Gold10μ"	6 Gold10μ"
		7 Gold15μ"	7 Gold15μ"
		S Special	S Special

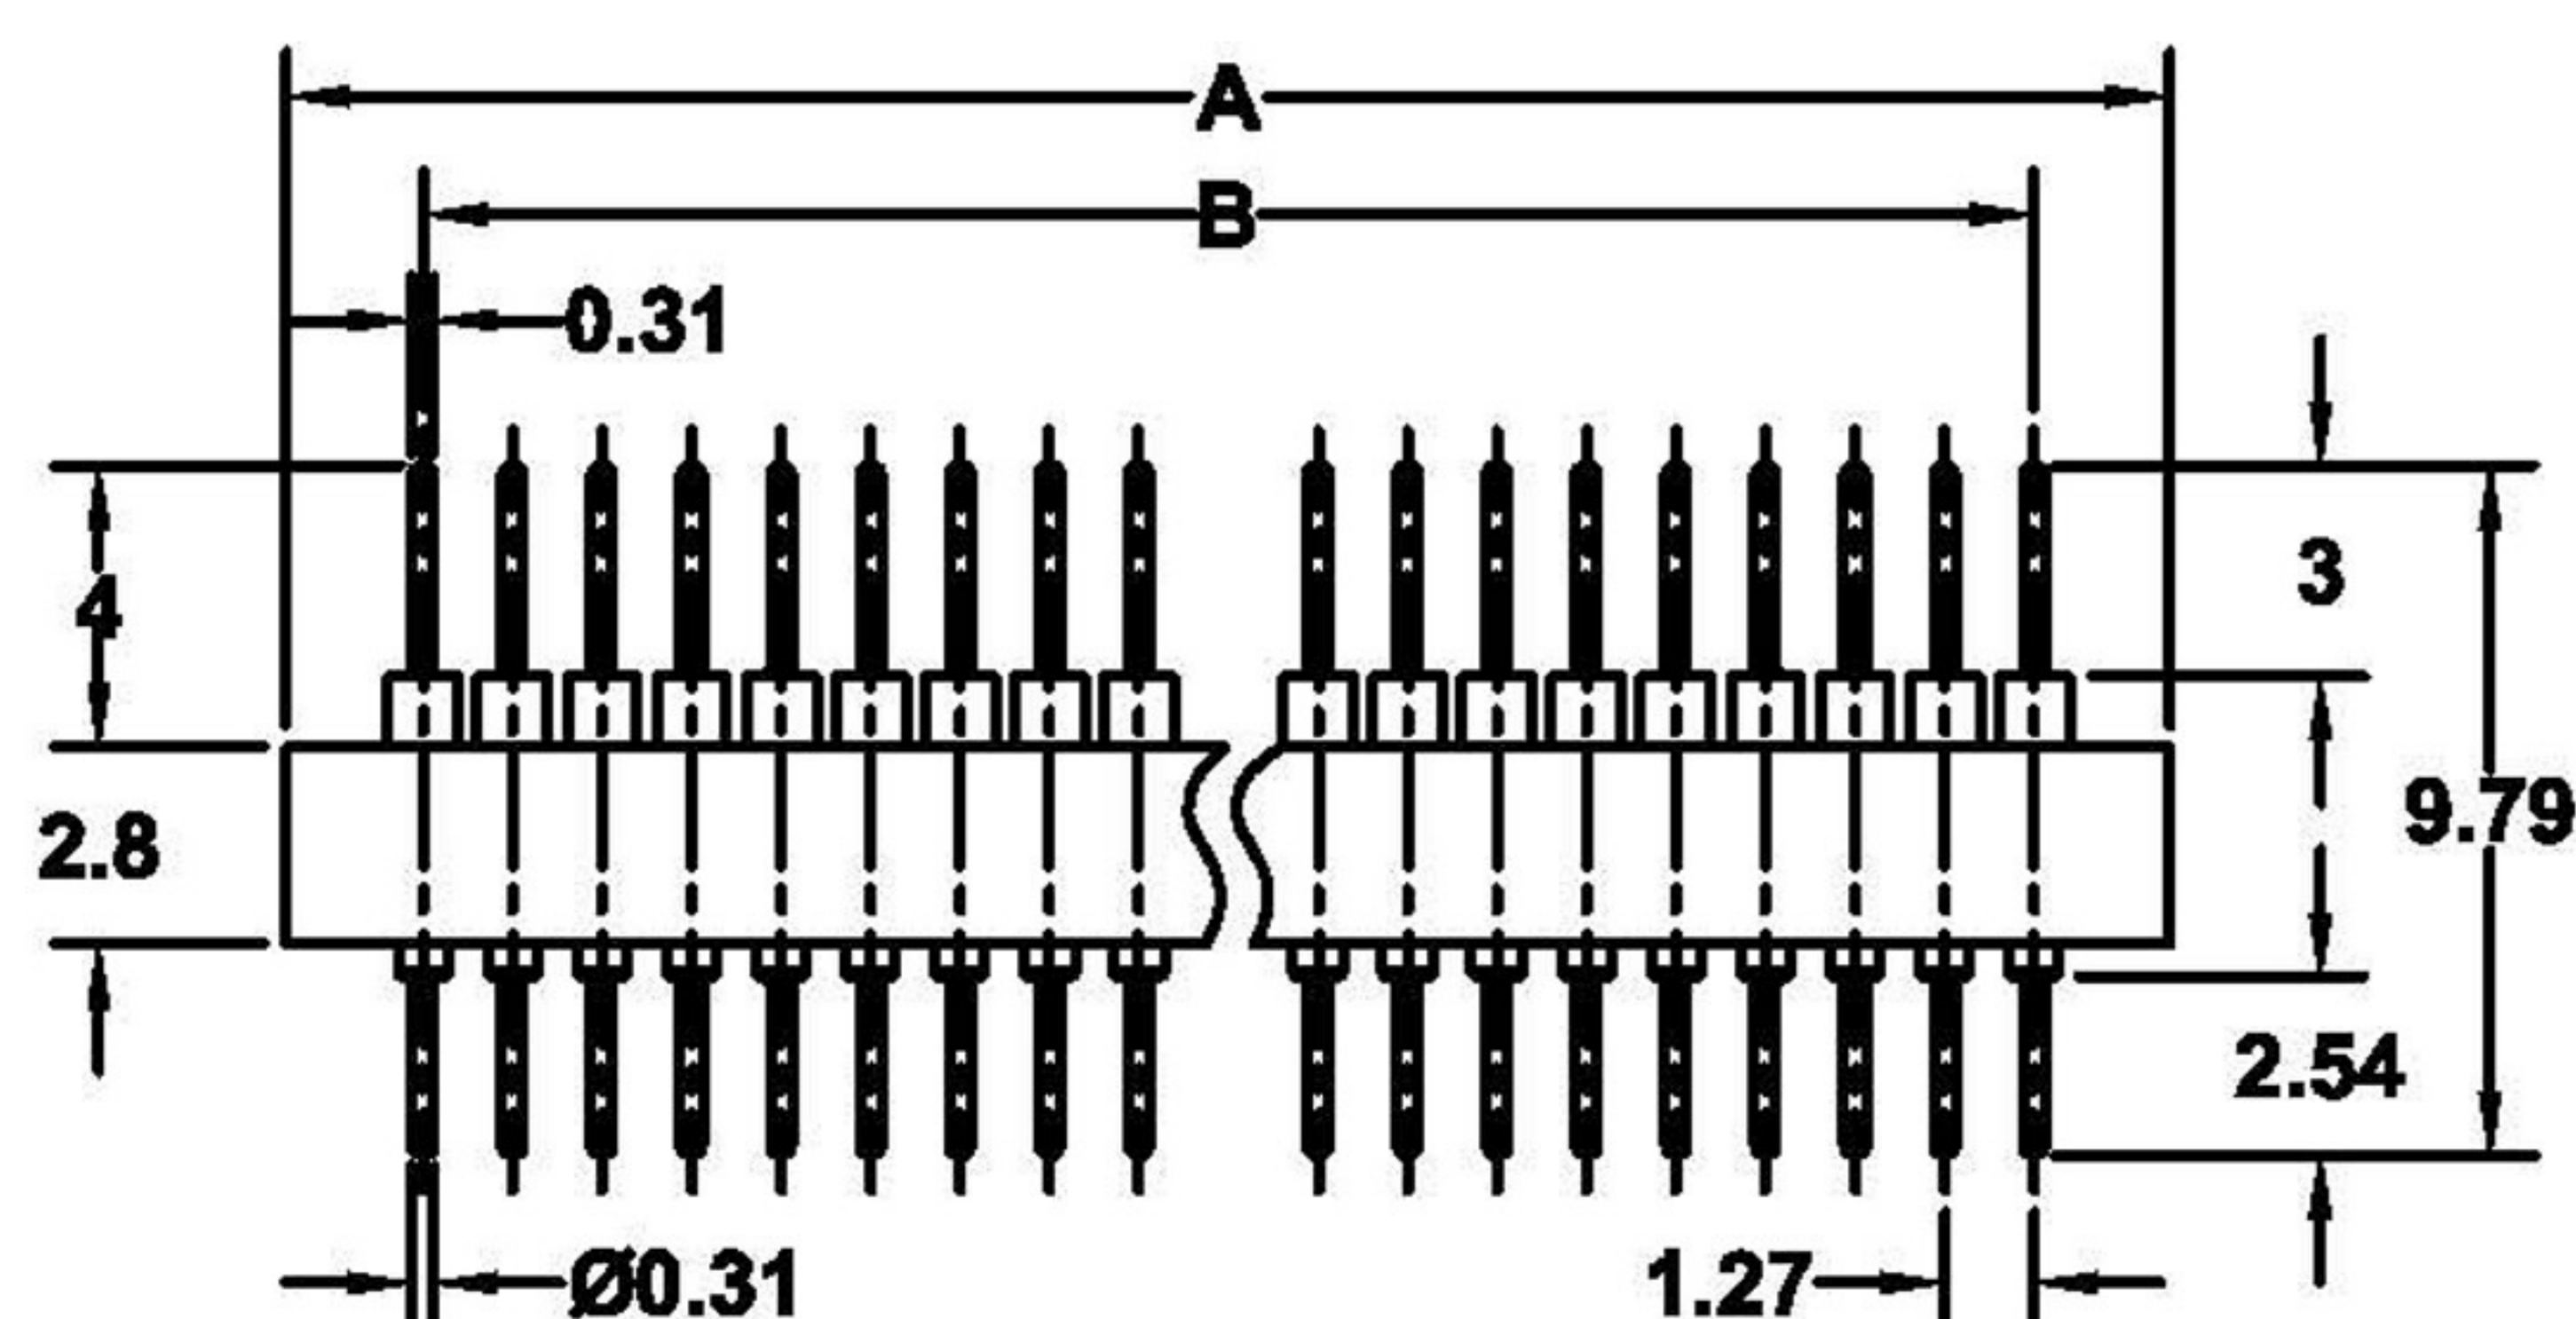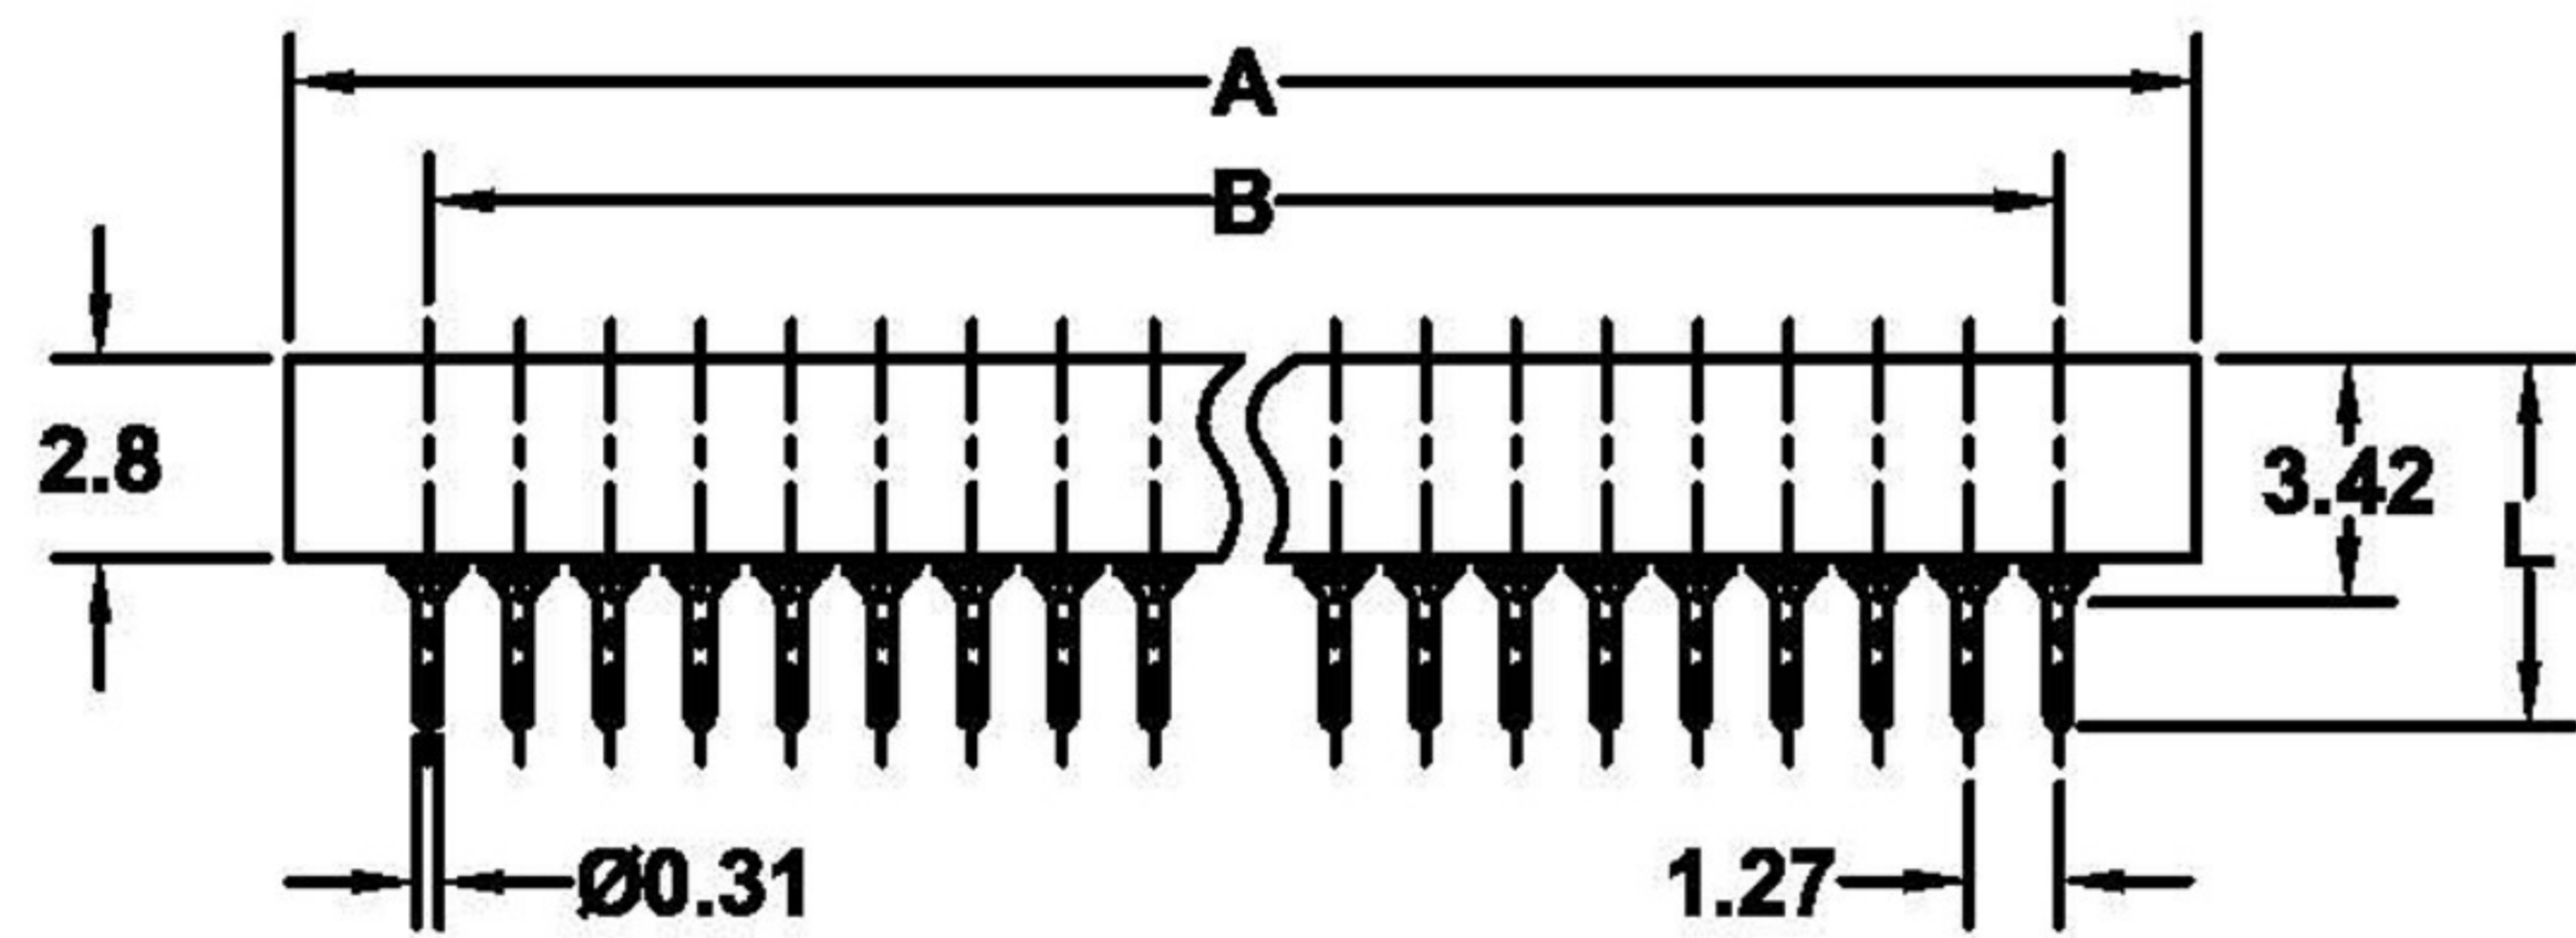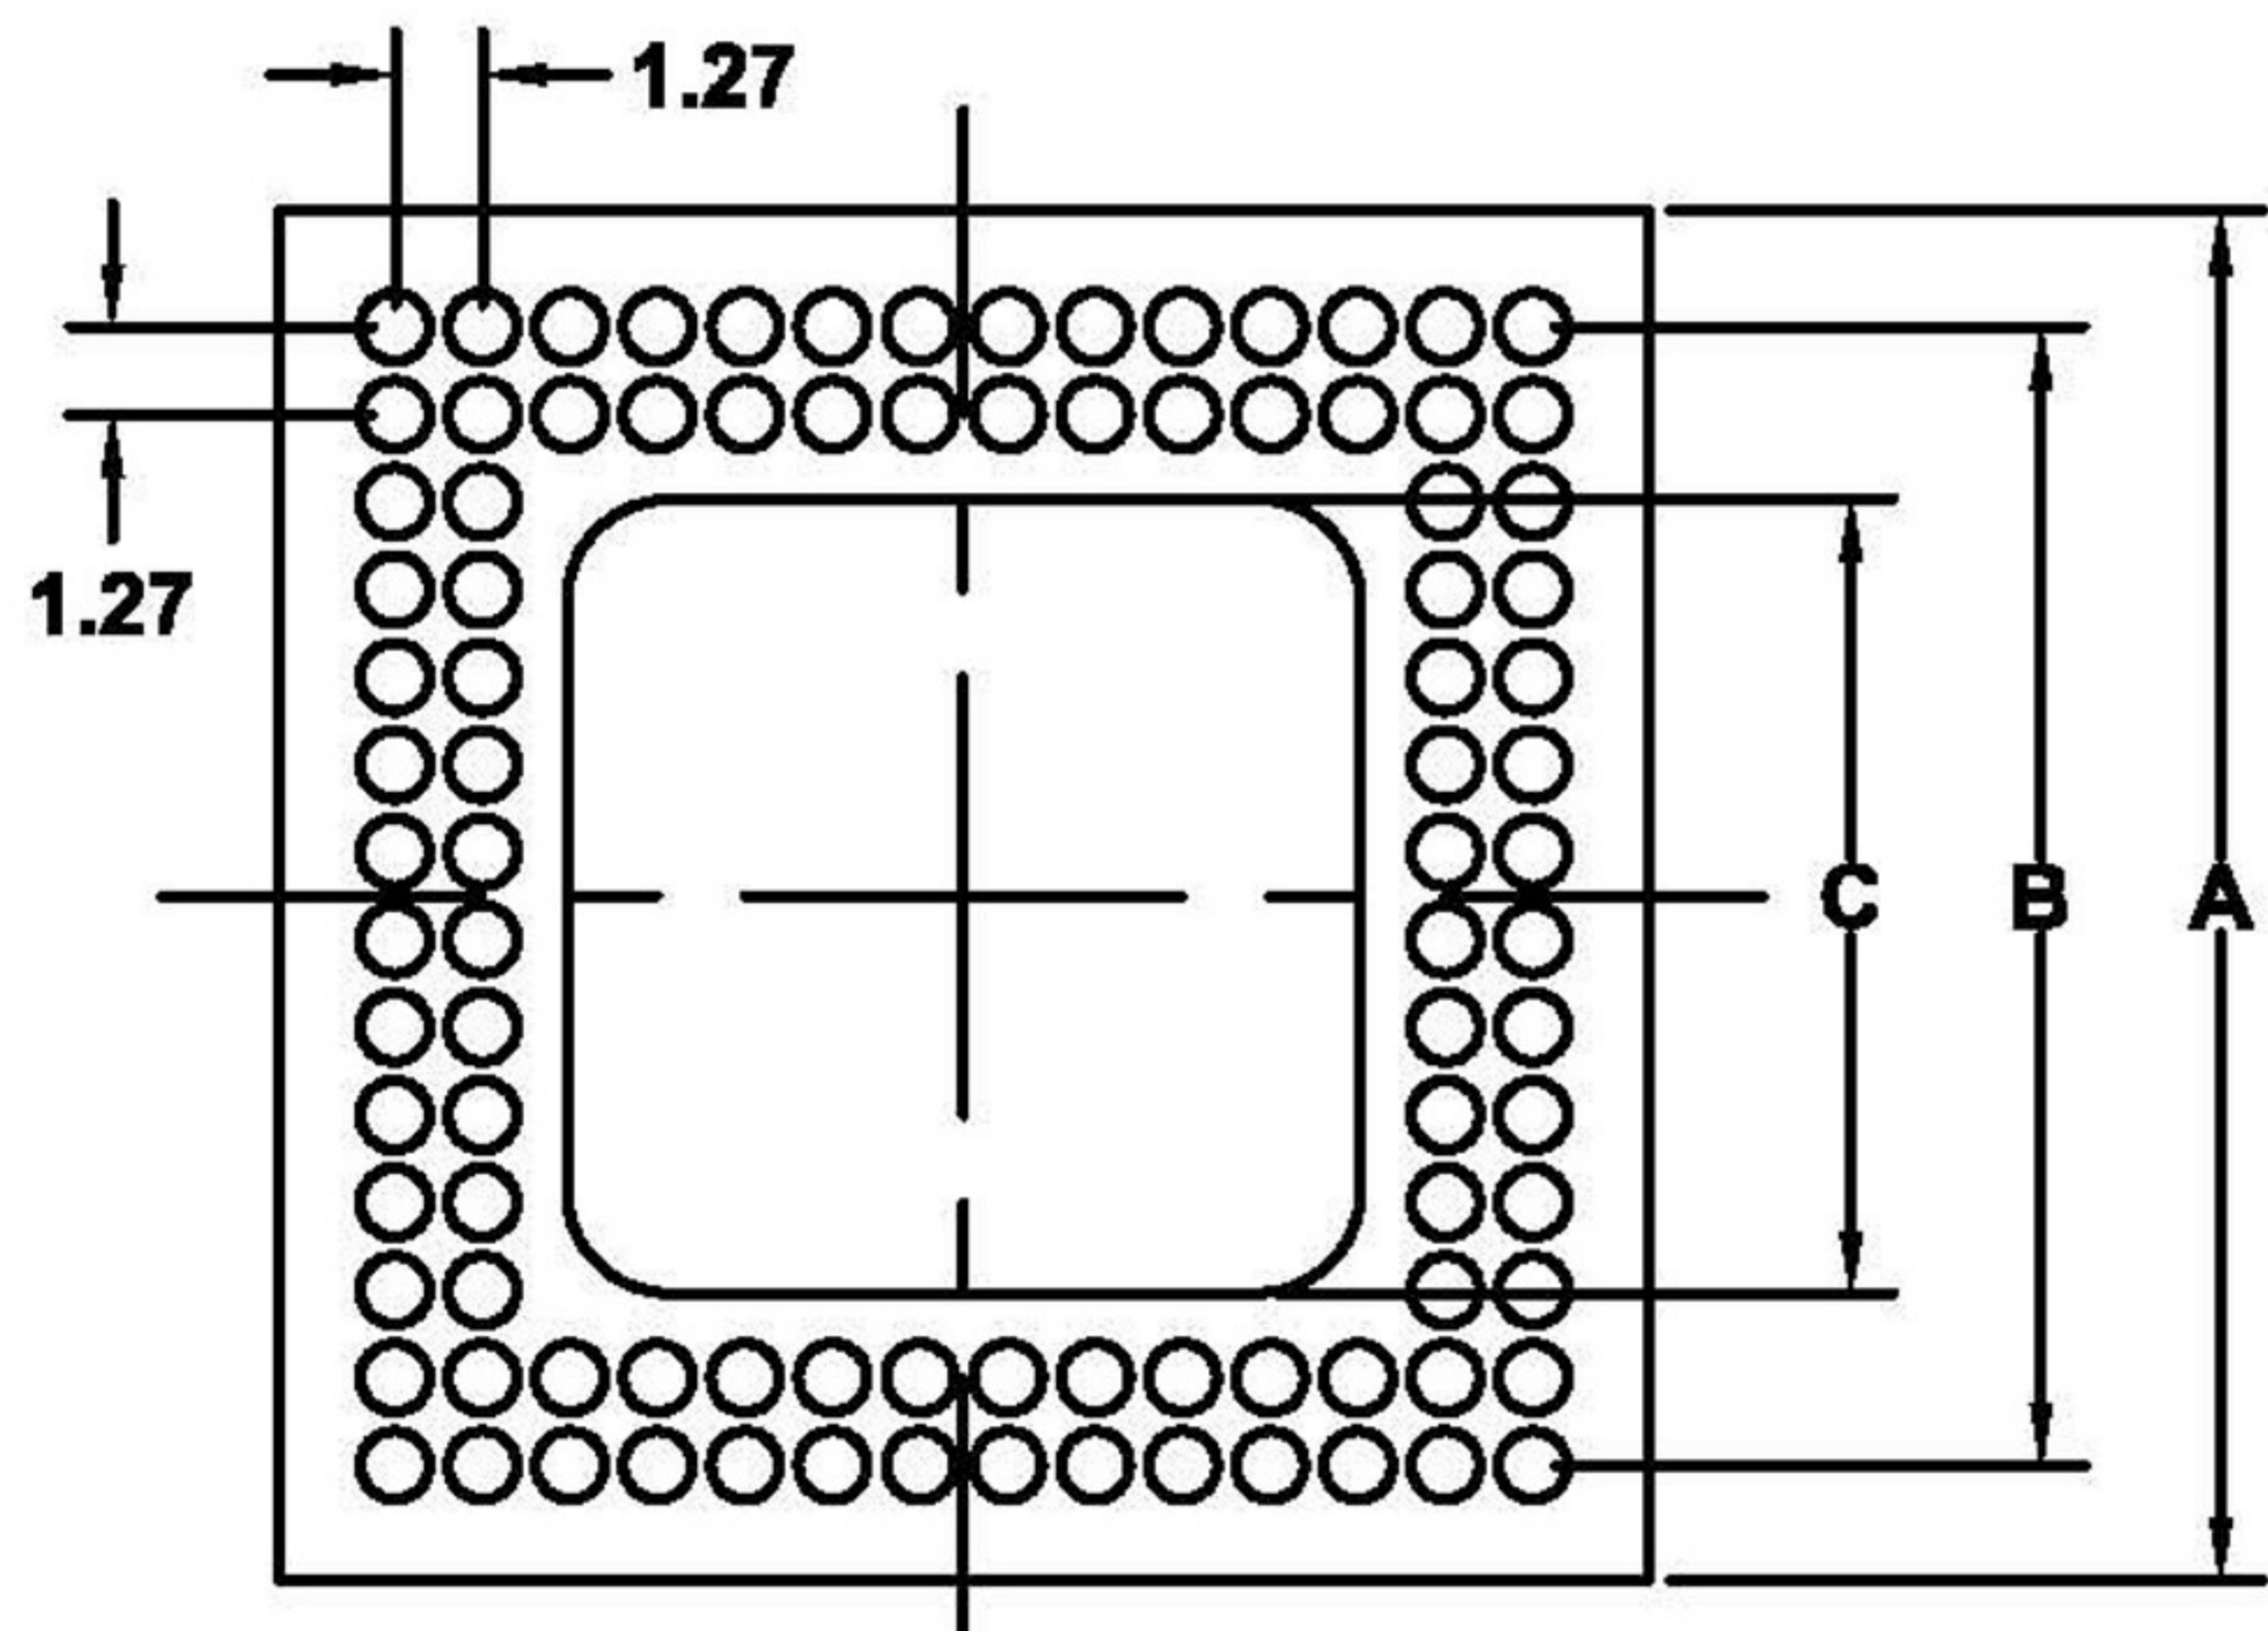

Pin grid array sockets and adapter surface mount

Technical Specs:

Insulator:	Black glass filled polyester FR4
Flammability:	UL 94V-O
Sleeve / pin:	Brass CuZn 36pb3(36000)
Contact clip (6 finger):	Beryllium copper (C17200)
Accepted pin Ø:	0.30 to 0.35 mm
Forces:	(polished steel gauge Ø 0.3mm)
-Insertion	0.2 N typ.
-Withdrawal	0.15 N typ.
Mechanical life:	min 100 cycles
Rated current:	1 A
Contact resistance:	max 10 mΩ
Dielectric strength:	min 500V RMS