REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED



R1 Type

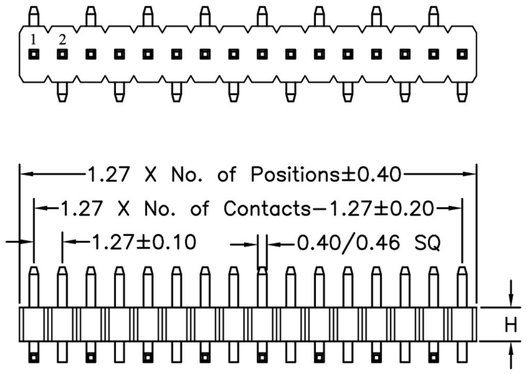





R1 Type

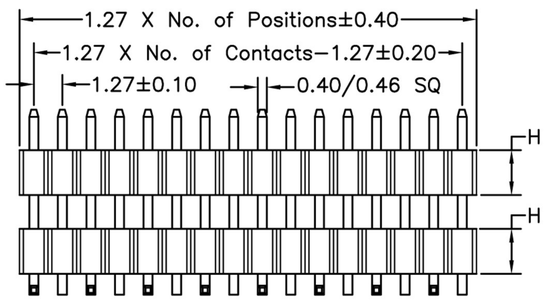





R2 Type

Recommended
P.C.B Board
Layout

R2 Type

Technical Data

Material:
Contact material: Brass
Insulator material:Black polyester UL94V-0
Standard:PA6T+30%G.F

Electrical:
Current rating: 1.0Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ⩾1000MΩ at V=100V
Withstanding voltage:300V AC/minute

Mechanical:
Operating temperatures: Gold plated:-55° C to+105° C
Tin plated:-40° C to+105° C
Soldering temperature: +260° C,10s max.

PCD1271

XX	2 -	X	XX	X	X	X	XX
High Option		Pin Quantity	No. of Positions	Plating Option	Insulator Material Option	Reflexed Type Option	Pin Length (B/C/D/W)
10 H=1.0mm 17 H=1.7mm 20 H=2.0mm 25 H=2.5mm		P 0.40SQ Q 0.46SQ	02 to 50	A G/F B Au3μ" C Au5μ" D Au10μ" E Au15μ" S Special	A BK-PBT B BK-PA66 C BK-PA6T D BK-PA46 F BK-LCP S Special	A R1 Type B R2 Type	01~99

深圳平志电子有限公司
SHENZHEN PIZCONN ELECTRONIC CO.,LTD

Title: 1.27mm(0.05")
Pin Header Single Row S.M.T Type

Part NO: PCD1271

UNIT: mm

E-mail: ivan@pizconn.com.cn