REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED



R1 Type



R2 Type

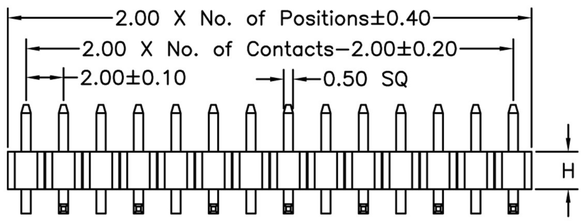



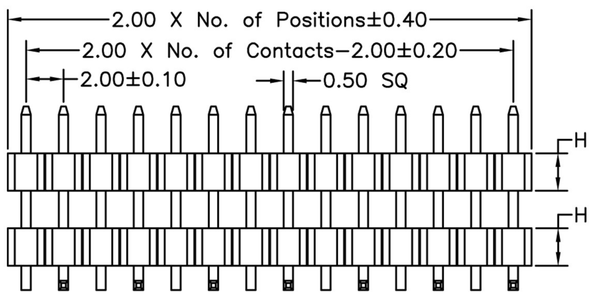



Recommended
P.C.B Board
Layout

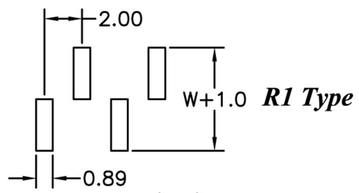

R1 Type



R2 Type

Technical Data

Material:
Contact material: Brass
Insulator material:Black polyester UL94V-0
Standard:PA6T+30%G.F

Electrical:
Current rating: 1.5Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ⩾1000MΩ at V=100V
Withstanding voltage:450V AC/minute

Mechanical:
Operating temperatures: Gold plated:-55° C to+105° C
Tin plated:-40° C to+105° C
Soldering temperature: +260° C,10s max.

PED2001

XX	X	- P	XX	X	X	X	XX
High Option	Insulator Quantity		No. of Positions	Plating Option	Insulator Material Option	Reflexed Type Option	Pin Length (B/C/D/W)
15 H=1.5mm 20 H=2.0mm	1 1PCS 2 2PCS 3 3PCS S Special		02 to 40	A G/F B Au3μ" C Au5μ" D Au10μ" E Au15μ" S Special	A BK-PBT B BK-PA66 C BK-PA6T D BK-PA46 F BK-LCP S Special	A R1 Type B R2 Type	01~99

深圳平志电子有限公司
SHENZHEN PIZCONN ELECTRONIC CO.,LTD

Title: 2.00mm(0.0787")
Pin Header Sigle Row S.M.T Type

Part NO: PED2001

UNIT: mm

E-mail: ivan@pizconn.com.cn