REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

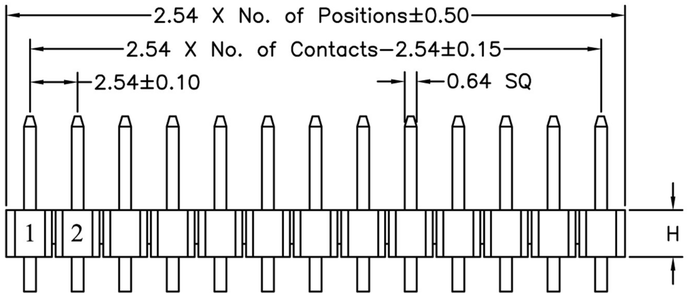



R1 Type

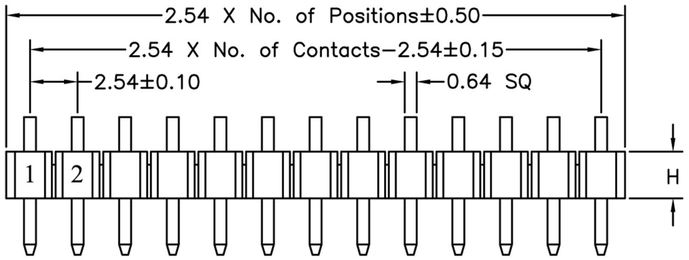



R2 Type

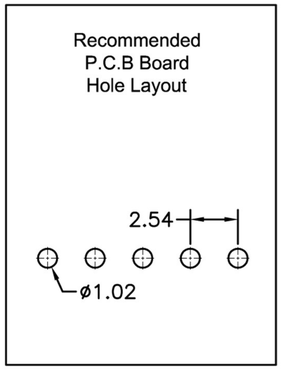

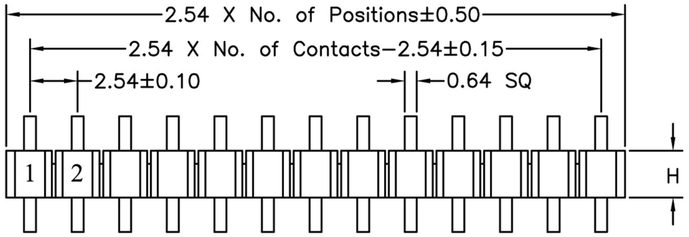



R3 Type

Technical Data

Material:
Contact material: Brass
Insulator material:Black polyester UL94V-0
Standard:PBT+30%G.F

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ⩾1000MΩ at V=100V
Withstanding voltage:550V AC/minute

Mechanical:
Operating temperatures: Gold plated:-55° C to+105° C
Tin plated:-40° C to+105° C
Soldering temperature: +220° C,10s max.

PHB2541	XX	1 - P	XX	X	X	X	XX
	High Option 15 H=1.5mm 17 H=1.7mm 20 H=2.0mm 25 H=2.5mm		No. of Positions 01 to 40	Plating Option A G/F B Au3μ" C Au5μ" D Au10μ" E Au15μ" S Special	Insulator Material Option A BK-PBT B BK-PA66 C BK-PA6T D BK-PA46 F BK-LCP S Special	Reflexed Type Option A R1 Type B R2 Type C R3 Type	Pin Length (A/B/D/W) 01~99

深圳平志电子有限公司
SHENZHEN PIZCONN ELECTRONIC CO.,LTD

Title: 2.54mm(0.1")
Pin Header Single Row Right Angle Dip Type

Part NO: PHB2541

UNIT: mm

E-mail: ivan@pizconn.com.cn