| REVISION DATA | | | | |
|---|---|---|---|---|
| SYM | ECN | DESCRIPTION | DATE | APPROVED |
| | | | | |
| | | | | |




***R1 Type***




***R2 Type***

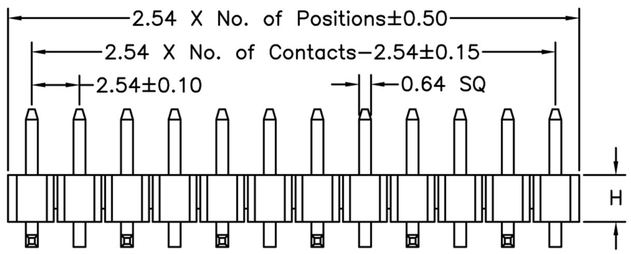





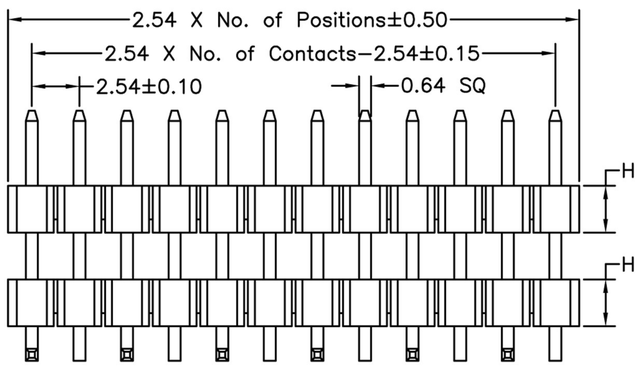


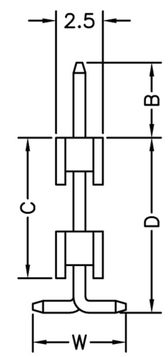


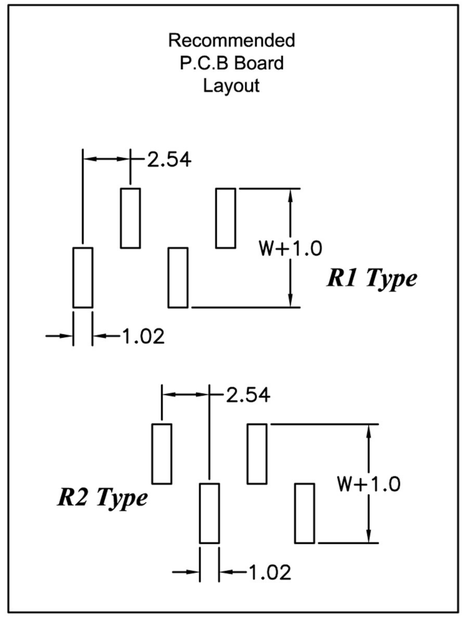


## Technical Data

Material:
Contact material: Brass
Insulator material:Black polyester UL94V-0
Standard:PA6T+30%G.F

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ⩾1000MΩ at V=100V
Withstanding voltage:550V AC/minute

Mechanical:
Operating temperatures: Gold plated:-55° C to+105° C
Tin plated:-40° C to+105° C
Soldering temperature: +260° C,10s max.

**PHD2541**

| XX | X | - P | XX | X | X | X | XX |
|---|---|---|---|---|---|---|---|
| High Option | Insulator Quantity | | No. of Positions | Plating Option | Insulator Material Option | Reflexed Type Option | Pin Length (B/C/D/W) |
| 15 H=1.5mm<br>17 H=1.7mm<br>20 H=2.0mm<br>25 H=2.5mm | 1 1PCS<br>2 2PCS<br>3 3PCS<br>S Special | | 02 to 40 | A G/F<br>B Au3μ"<br>C Au5μ"<br>D Au10μ"<br>E Au15μ"<br>S Special | A BK-PBT<br>B BK-PA66<br>C BK-PA6T<br>D BK-PA46<br>F BK-LCP<br>S Special | A R1 Type<br>B R2 Type | 01~99 |

深圳平志电子有限公司
SHENZHEN PIZCONN ELECTRONIC CO.,LTD

Title: 2.54mm(0.1")
Pin Header Single Row S.M.T Type

Part NO: PHD2541

UNIT: mm

E-mail: ivan@pizconn.com.cn