REVISION DATA				
SYM	ECN	DESCRIPTION	DATE	APPROVED

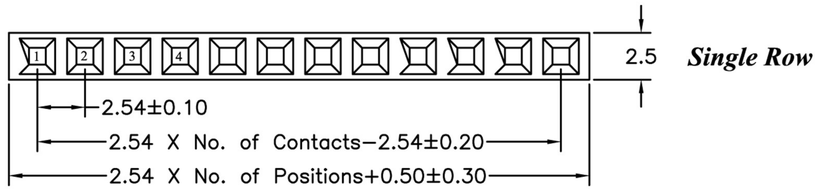

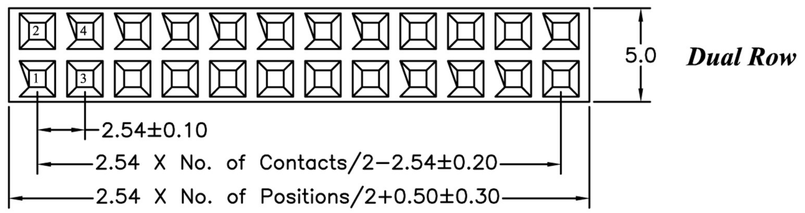

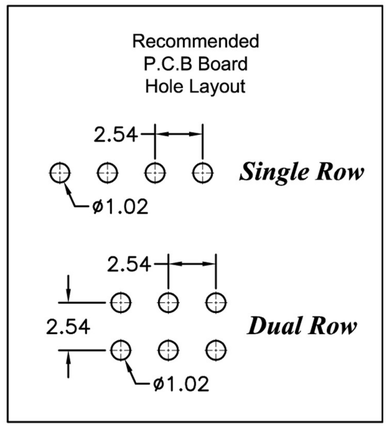

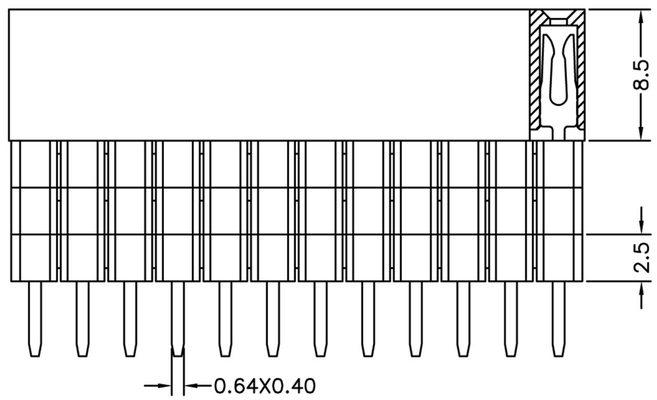

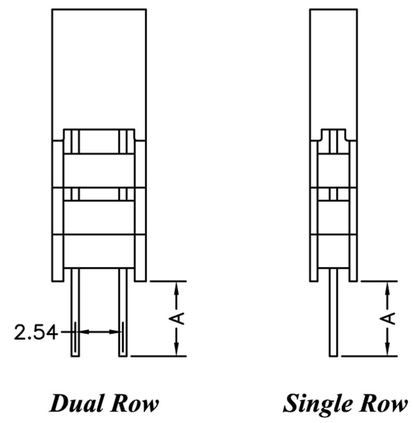

Technical Data

Material:
Contact material: Brass
Insulator material:Black polyester UL94V-0
Standard:PBT+30%G.F

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ⩾1000MΩ at V=100V
Withstanding voltage:550V AC/minute

Mechanical:
Operating temperatures: Gold plated:-55° C to+105° C
Tin plated:-40° C to+105° C
Soldering temperature: +220° C,10s max.

FDA2549

X	85	X	-	Y	XX	X	X	A	XX

Row Option	Insulator Quantity	No. of Positions	Plating Option	Insulator Material Option	Pin Length (A)
1 Single Row	1 1PCS	02 to 40	A G/F	A BK-PBT	01 3.1mm
2 Dual Row	2 2PCS	04 to 80	B Au3μ"	B BK-PA66	
	3 3PCS		C Au5μ"	C BK-PA6T	
	4 4PCS		D Au10μ"	D BK-PA46	
			E Au15μ"	F BK-LCP	
			S Special	S Special	

深圳平志电子有限公司
SHENZHEN PIZCONN ELECTRONIC CO.,LTD

Title: 2.54mm(0.1")
Female Header Row Straight Dip Type

Part NO: FDA2549

UNIT: mm

E-mail: ivan@pizconn.com.cn