



Crown Spring Series

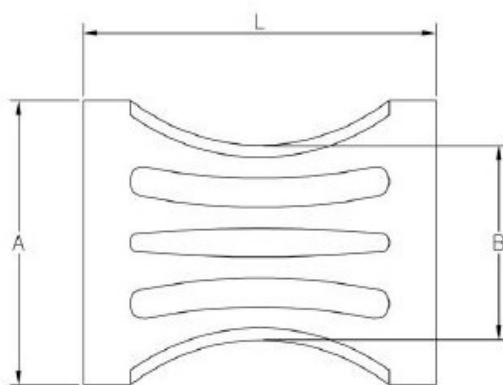

Model	Part NO.	Matching pin (mm)	Dia.(A) mm	Dia.(B) mm	Length (L) mm	Material Thickness (H) mm	Length*Width and Q'ty of Ribs (mm)	Insertion /withdrawal force (N)	Max. Current rating (A)	Q'ty/g (pcs)
K22#	PDS2230A	Φ0.8	Φ1.35	Φ0.5	3.0	0.10	2.0×0.26—5	≥0.3	2A	200
	PDS2250A		Φ1.35	Φ0.5	5.0	0.10	3.2×0.26—5	≥0.3	2A	
K20#	PDS2036A	Φ1.0	Φ1.7	Φ0.7	3.6	0.10	2.6×0.26—7	≥0.4	5A	95
	PDS2040A		Φ1.5	Φ0.6	4.0	0.12	2.8×0.32—5	≥0.5	5A	100
	PDS2050A		Φ1.6	Φ0.7	5.0	0.10	3.2×0.26—6	≥0.4	5A	95—98
K16#	PDS1645A	Φ1.5	Φ2.1	Φ1.05	4.5	0.10	3.0×0.36—7	≥1.0	8A	78
	PDS1640A		Φ2.3	Φ1.05	4.0	0.12	2.8×0.32—8	≥1.0	8A	70
	PDS1660A		Φ2.4	Φ1.05	6.0	0.12	4.0×0.32—7	≥1.2	10A	41
K14#	PDS1460A	Φ2.0	Φ2.7	Φ1.6	6.0	0.12	4.0×0.32—10	≥2.0	15A	38
K12#	PDS1260A	Φ2.4	Φ3.2	Φ1.9	6.0	0.15	4.2×0.36—11	≥3.0	30A	24—25
K10#	PDS1060A	Φ3.0	Φ3.8	Φ2.5	6.0	0.15	5.7×0.36—13	≥3.5	40A	
	PDS1080A		Φ4.0	Φ2.6	8.0	0.20	5.2×0.48—10	≥6.0	40A	11
K8#	PDS0860A	Φ3.5	Φ4.4	Φ3.2	6.0	0.15	4.0×0.48—11	≥4.0	50A	18
	PDS0880A		Φ4.4	Φ3.2	8.0	0.15	5.7×0.36—15	≥4.0	50A	
	PDS0880B		Φ4.5	Φ3.2	8.0	0.20	5.2×0.48—11	≥6.0	50A	
K4#	PDS0480A	Φ4.0	Φ5.1	Φ3.6	8.0	0.20	5.2×0.48—13	≥6.0		
	PDS0490A	Φ5.0	Φ6.2	Φ4.5	9.0	0.20	5.6×0.58-15			
	PDS0490B	Φ6.0	Φ7.3	Φ5.6	9.0	0.20	5.6×0.58-17			

Material: Beryllium Copper (QBe2.0)
Hollow heat treatment: HV330-390



Shenzhen Pizconn Electronic Co., Ltd.

Email: ivan@pizconn.com.cn